

# SCIENTIFIC REPORTS



OPEN

## Enhanced dielectric properties of poly(vinylidene fluoride) composites filled with nano iron oxide-deposited barium titanate hybrid particles


Changhai Zhang<sup>1,2</sup>, Qingguo Chi<sup>1,3,4</sup>, Jiufeng Dong<sup>1,3</sup>, Yang Cui<sup>1,3</sup>, Xuan Wang<sup>1</sup>, Lizhu Liu<sup>1,2</sup> & Qingquan Lei<sup>1</sup>

We report enhancement of the dielectric permittivity of poly(vinylidene fluoride) (PVDF) generated by depositing magnetic iron oxide ( $\text{Fe}_3\text{O}_4$ ) nanoparticles on the surface of barium titanate (BT) to fabricate BT- $\text{Fe}_3\text{O}_4$ /PVDF composites. This process introduced an external magnetic field and the influences of external magnetic field on dielectric properties of composites were investigated systematically. The composites subjected to magnetic field treatment for 30 min at 60 °C exhibited the largest dielectric permittivity (385 at 100 Hz) when the BT- $\text{Fe}_3\text{O}_4$  concentration is approximately 33 vol.%. The BT- $\text{Fe}_3\text{O}_4$  suppressed the formation of a conducting path in the composite and induced low dielectric loss (0.3) and low conductivity ( $4.12 \times 10^{-9}$  S/cm) in the composite. Series-parallel model suggested that the enhanced dielectric permittivity of BT- $\text{Fe}_3\text{O}_4$ /PVDF composites should arise from the ultrahigh permittivity of BT- $\text{Fe}_3\text{O}_4$  hybrid particles. However, the experimental results of the BT- $\text{Fe}_3\text{O}_4$ /PVDF composites treated by magnetic field agree with percolation theory, which indicates that the enhanced dielectric properties of the BT- $\text{Fe}_3\text{O}_4$ /PVDF composites originate from the interfacial polarization induced by the external magnetic field. This work provides a simple and effective way for preparing nanocomposites with enhanced dielectric properties for use in the electronics industry.

Dielectric materials that possess high dielectric permittivity ( $\epsilon$ ) and dielectric field strength without excessive dielectric loss are necessary to meet the miniaturization requirements of microelectronic device-structures, including gate dielectrics, high charge-storage capacitors and electro-active materials<sup>1-3</sup>. Polymer materials are currently of considerable interest as high-permittivity materials for electronics applications. However, their low dielectric permittivity limits their application. Many strategies to increase the dielectric permittivity of polymers have been reported<sup>4</sup> and the introduction of high dielectric permittivity nanoparticles (e.g.,  $\text{CaCu}_3\text{Ti}_4\text{O}_{12}$  (CCTO) and BT nanoparticles) into a polymer matrix has been widely adopted<sup>5-9</sup>. Unfortunately, the dielectric permittivity improvement for two-phase composite materials is still limited and often requires a large filler loading (>60 vol.%) to enhance the dielectric permittivity, which causes the materials to lose their flexibility and uniformity. Investigations of percolative materials have been carried out by incorporating metal powders or other conductive fillers into a polymer matrix<sup>10</sup>. Ultra-high dielectric constant values can be achieved; however, a high conductivity and dielectric loss also result when the filler content approaches the percolation threshold.

To overcome these limitations, researchers have focused on improving the dielectric properties of the materials *via* surfactant treatment of the filler by a coupling agent<sup>10-14</sup>. Improving the physical compatibility at a novel interface can guarantee good dispersion of the ceramic particles. Luo *et al.*<sup>12</sup> modified BT nanoparticles

<sup>1</sup>Key Laboratory of Engineering Dielectrics and Its Application, Ministry of Education, Harbin University of Science and Technology, Harbin 150080, P. R. China. <sup>2</sup>School of Materials Science and Engineering, Harbin University of Science and Technology, Harbin 150080, P. R. China. <sup>3</sup>School of Applied Science, Harbin University of Science and Technology, Harbin 150080, P. R. China. <sup>4</sup>State Key Laboratory of Electrical Insulation and Power Equipment, Xi'an Jiaotong University, Xi'an 710049, P. R. China. Correspondence and requests for materials should be addressed to Q.C. (email: qgchi@hotmail.com)

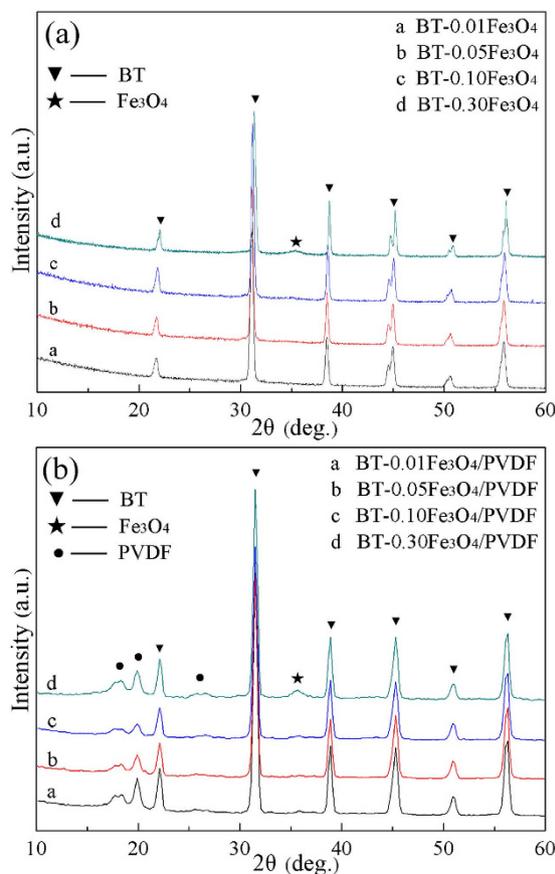


**Figure 1.** (a) XRD patterns from BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles with different BT and Fe<sub>3</sub>O<sub>4</sub> ratios. (b) XRD patterns from BT-*x*Fe<sub>3</sub>O<sub>4</sub>/PVDF composites with 20 vol.% BT-*x*Fe<sub>3</sub>O<sub>4</sub>.

using hydantoin epoxy resin and found that hydantoin/BT-P(VDF-HFP) (P(VDF-HFP): poly(vinylidene fluoride-*co*-hexafluoropropylene) nanocomposites had a high dielectric permittivity ( $\epsilon = 48.9$ ) and a low dielectric loss (0.06) with 50 vol.% filler loading at 1 kHz. Fu *et al.*<sup>13</sup> modified BT particles using polyvinyl pyrrolidone (PVP) fillers to realize composites with high dielectric permittivity ( $\epsilon \approx 120$ ) and low loss tangent ( $\tan \delta \approx 0.3$ ) with 60 vol.% filler loading at 100 Hz. Another promising strategy is to fabricate three-phase polymeric composites containing conductive fillers<sup>15,16</sup>. Yang and co-workers<sup>15</sup> prepared Ni/CCTO/PVDF composites with a dielectric constant (140) and a dielectric loss of 0.5 near the percolation threshold when the filler content of Ni and CCTO was 60 vol.%. Many researchers have reported that nano-sized Ag particles discretely deposited on the surface of the ceramic can efficiently enhance the dielectric permittivity of the composites<sup>17-19</sup>. Luo *et al.*<sup>17</sup> prepared PVDF embedded with BT-Ag nanoparticles and found that the BT-Ag/PVDF composites with 56.8 vol.% filler loading presented a high dielectric permittivity ( $\epsilon = 160$ ) and a low dielectric loss (0.11) at 1 kHz. However, even with the high-volume fraction of inorganic compounds in the composite, the dielectric permittivity of the composite was not high enough for the practical application.


Shear flow, magnetic field, electric field, or electric force can change the molecular arrangement of a polymer and the distribution of conductive particles in a host polymer, which influence the microstructure and macro-properties of composites<sup>20-24</sup>. In this study, we fabricated super-paramagnetic Fe<sub>3</sub>O<sub>4</sub> nanoparticles deposited on the surface of BT ceramic particles via a chemical precipitation method. On this basis, we have designed BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites treated under a constant magnetic field for 30 min at 60 °C. The morphology of BT-Fe<sub>3</sub>O<sub>4</sub> particles was characterized by transmission electron microscopy (TEM), and the composites were studied by scanning electron microscopy (SEM). The effect of an external magnetic field on the dielectric properties of the composites filled by BT-Fe<sub>3</sub>O<sub>4</sub> and correlation with the structure and morphology of the composites are also discussed systematically.

## Results and Discussion

**Characterization of the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles and BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites.** Figure 1a shows XRD patterns from BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles with different the volume fraction of Fe<sub>3</sub>O<sub>4</sub>. The characteristic diffraction peaks of BT appear at  $2\theta = 22^\circ, 31^\circ, 38^\circ, 45^\circ$  and  $56^\circ$  corresponding to the diffraction peaks from (010), (110), (111), (200) (002), and (211), respectively. When the diffraction angle was  $45^\circ$ , splitting of the (200) and (002) peaks was observed, which indicates that the BT nanoparticles had a tetragonal phase structure. Diffraction peaks characteristic of Fe<sub>3</sub>O<sub>4</sub> were observed in the patterns from the BT-*x*Fe<sub>3</sub>O<sub>4</sub> hybrid particles when the volume fraction of Fe<sub>3</sub>O<sub>4</sub> increased to 30 vol.%. Figure 1b shows that the diffraction peak of Fe<sub>3</sub>O<sub>4</sub>

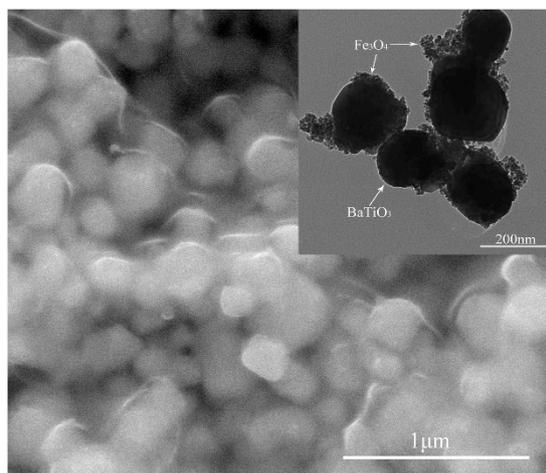


**Figure 2.** SEM image of BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles. The inset shows the TEM image of BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles.

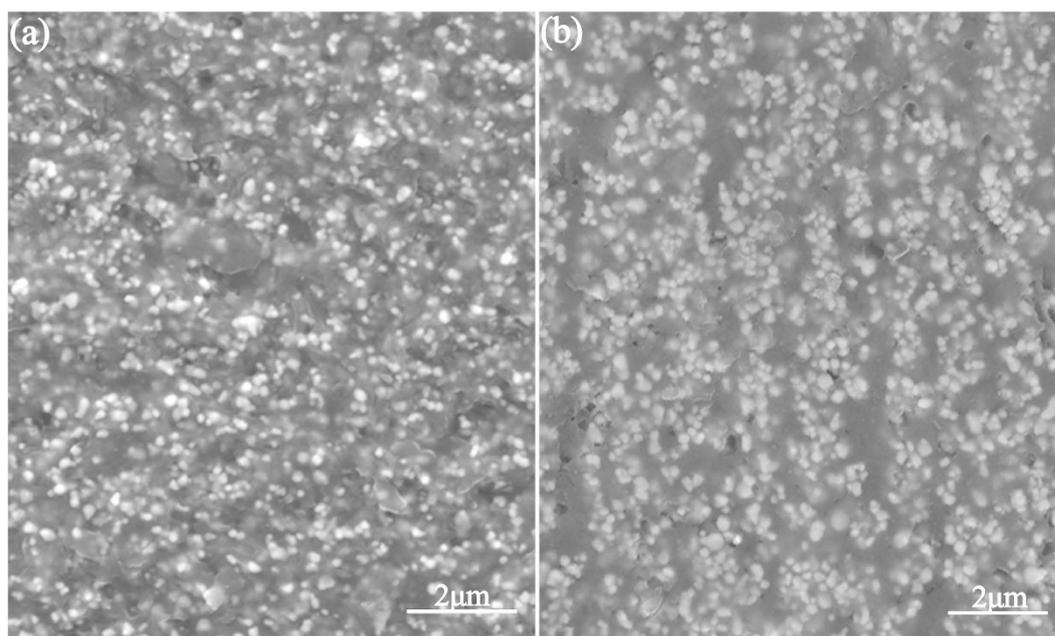


**Figure 3.** (a) Cross-sectional SEM image of a fractured BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composite with 33 vol.% BT-Fe<sub>3</sub>O<sub>4</sub> filler. (b) Cross-sectional SEM image of a fractured BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composite with 33 vol.% BT-Fe<sub>3</sub>O<sub>4</sub> filler annealed under a magnetic field.

appeared at  $2\theta = 35.6^\circ$  for the BT- $x$ Fe<sub>3</sub>O<sub>4</sub>/PVDF composites. The XRD patterns of the composites clearly demonstrated that the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles filled the polymer matrix.

SEM and TEM were used to study the size and morphology of the BT-Fe<sub>3</sub>O<sub>4</sub> nanoparticles. The BT particles were spherical in shape and had an average diameter of approximately 200 nm, as shown in Fig. 2. The TEM image of the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles, shown in the inset of Fig. 2, showed that the Fe<sub>3</sub>O<sub>4</sub> nanoparticles were discontinuously deposited on the surface of the BT, and the Fe<sub>3</sub>O<sub>4</sub> nanoparticles were significantly smaller than the BT particles (diameters of 10–20 nm). There was some agglomeration of the Fe<sub>3</sub>O<sub>4</sub> nanoparticles on the surface of the BT ceramic powders. This phenomenon occurs because the Fe<sub>3</sub>O<sub>4</sub> nanoparticles have a high specific surface area and are prone to agglomeration. Figure 3a depicts a SEM image of a fractured cross-section of BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composite with 33 vol.% BT-Fe<sub>3</sub>O<sub>4</sub> filler. It can be found that the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles are homogeneously embedded in the PVDF matrix to form a random composites without obvious agglomeration. Figure 3b shows a cross-sectional SEM image of BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites with 30 vol.% BT-Fe<sub>3</sub>O<sub>4</sub>, some of the magnetic BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles showed a directional arrangement along the direction of the magnetic field when the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites were treated under a constant magnetic field for 30 min at 60 °C; although some BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles formed clusters, it is impossible for them to form a conductive network through the whole

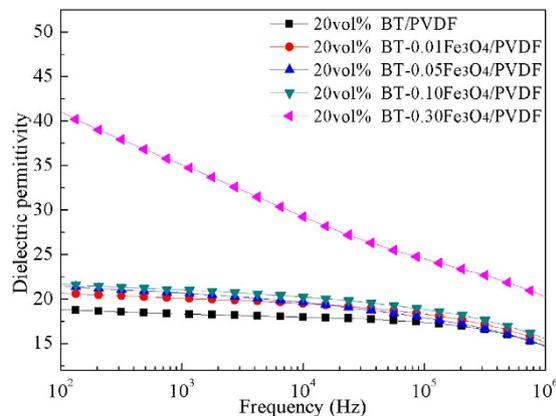

**Figure 4.** Dependence of dielectric permittivity on frequency of the 20 vol.% BT- $x\text{Fe}_3\text{O}_4$ /PVDF composites at room temperature.

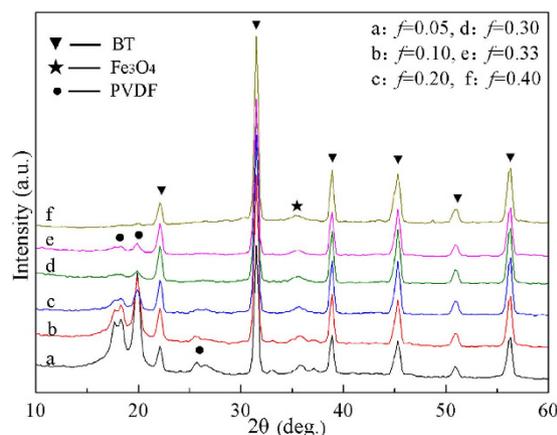


**Figure 5.** XRD patterns from the BT- $0.3\text{Fe}_3\text{O}_4$ /PVDF composites with BT- $0.3\text{Fe}_3\text{O}_4$  volume fractions between 5 vol.% and 40 vol.%.

system. This phenomenon also indicated that magnetic fields have changed the distribution of the BT- $\text{Fe}_3\text{O}_4$  hybrid particles in the PVDF matrix.

**Dielectric properties of the BT- $\text{Fe}_3\text{O}_4$ /PVDF composites.** To obtain the composite materials with excellent dielectric properties, the effects of different  $\text{Fe}_3\text{O}_4$  volume fractions in the BT- $\text{Fe}_3\text{O}_4$  particles on the electrical properties were explored. The dependence of dielectric permittivity on the frequency of the 20 vol.% BT- $x\text{Fe}_3\text{O}_4$ /PVDF composites in the frequency range from 100 Hz to 1 MHz at room temperature is shown in Fig. 4. The dielectric permittivity of the composites showed a weak frequency dependence when the volume fraction of  $\text{Fe}_3\text{O}_4$  was less than 10 vol.%. When the volume fraction of  $\text{Fe}_3\text{O}_4$  was greater than 10 vol.%, the dielectric permittivity increased significantly and the frequency dependence of the dielectric permittivity of composites gradually increased as the volume fraction increased, especially at low frequency. The dielectric permittivity of the 20 vol.% BT- $x\text{Fe}_3\text{O}_4$ /PVDF composite was 42 when the volume fraction of  $\text{Fe}_3\text{O}_4$  reached 30 vol.%, which is 1.2 times higher than that of 20 vol.% BT/PVDF. This demonstrates that incorporating conducting fillers into the polymer matrix results in an increase in dielectric permittivity. The increased conductivity of the interlayer between the BT and PVDF matrix created by the  $\text{Fe}_3\text{O}_4$  enhances the space charge polarization and Maxwell-Wagner-Sillars effect, which play an important role in improving the dielectric permittivity<sup>25,26</sup>.

To understand the influence of the BT- $\text{Fe}_3\text{O}_4$  hybrid particles, the XRD patterns of BT- $0.3\text{Fe}_3\text{O}_4$ /PVDF composites with BT- $0.3\text{Fe}_3\text{O}_4$  volume fractions between 5 vol.% and 40 vol.% are shown in Fig. 5. In these patterns, the BT peaks did not show reflection splitting and no super-lattice reflections or secondary phases were present. After the BT- $0.3\text{Fe}_3\text{O}_4$  filler was incorporated into the PVDF matrix, the intensities of PVDF peaks were reduced and the BT and  $\text{Fe}_3\text{O}_4$  peaks became sharper and stronger. When the volume fraction of the BT- $0.3\text{Fe}_3\text{O}_4$  filler increased to 40 vol.%, the PVDF peaks became very weak because of the strong diffraction from the incorporated ceramic powders.

Based on the above-mentioned results, the BT- $0.3\text{Fe}_3\text{O}_4$ /PVDF composites were studied systematically at the following research. The dependence of the dielectric permittivity of the BT- $\text{Fe}_3\text{O}_4$ /PVDF composites with the different volume fractions of BT- $\text{Fe}_3\text{O}_4$  at room temperature is shown in Fig. 6a. The dielectric permittivity increased significantly when the volume fraction of BT- $\text{Fe}_3\text{O}_4$  increased. At 40 vol.% BT- $\text{Fe}_3\text{O}_4$  hybrid particles,

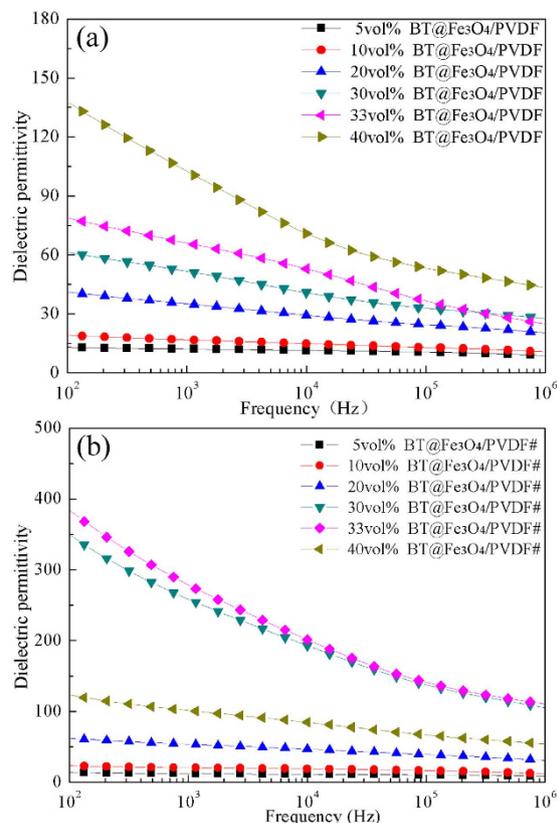


**Figure 6.** Dependence of dielectric permittivity on frequency of the (a) BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites and (b) BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites at room temperature.

Composites	$\epsilon$	$\tan \delta$	$\sigma$ (S/cm)	$f$ (vol.%)	Ref.
BT@Fe <sub>3</sub> O <sub>4</sub> /PVDF	138	0.24	$1.4 \times 10^{-9}$	40	Our work
BT@Fe <sub>3</sub> O <sub>4</sub> /PVDF#	385	0.3	$4.12 \times 10^{-9}$	33	Our work
BT@Fe <sub>3</sub> O <sub>4</sub> /PVDF#-1 kHz	280	0.27	$2.50 \times 10^{-8}$	33	Our work
Hydantoin/BT/P(VDF-HFP)	48.3	0.06		50	[12]
BT/PVDF treated by PVP	115	0.02		60	[27]
BT-Ag/PVDF-1 kHz	160	0.11	$9 \times 10^{-8}$	56.8	[17]
BT/SiC/PVDF	213.8	0.27	$3.31 \times 10^{-11}$	35	[28]
BT@SnO <sub>2</sub> /PVDF	$\approx 160$	$\approx 1.35$	$\approx 1 \times 10^{-8}$	45	[29]
R-ZnO/BT/PVDF	175	0.45		30	[30]
Ag@TiO <sub>2</sub> /PTFE	240	1	$1 \times 10^{-9}$	70	[31]
Al/ $\beta$ -SiC <sub>w</sub> /PVDF	350	0.48		52	[32]

**Table 1.** Comparison of the dielectric properties of our composites and reported literature materials at 100 Hz and room temperature.

the dielectric permittivity was 138, which is 15 times higher than that of the pure PVDF matrix. However, the dielectric permittivity of the composites was still not high enough for embedded devices. On this basis, we designed BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites by applying an external magnetic field. The frequency dependence of the dielectric properties of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites is shown in Fig. 6b. Dielectric permittivity increases with volume fraction up to 33 vol.%, and then decreases when volume fraction exceeds 33 vol.%. The dielectric permittivity of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites reached 385, which is 1.8 times higher than that of the 40 vol.% BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites and this value is higher than that of many previous reports<sup>12,17,27–32</sup>. For example, as shown in Table 1, this value was found to be significant larger than that of BT@SnO<sub>2</sub>/PVDF composites containing 45 vol.% BT@SnO<sub>2</sub> ( $\approx 160$ )<sup>29</sup>. It should be noted that a high dielectric permittivity (280) of BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites was obtained at 1 kHz and this value is superior to that of BT-Ag/PVDF composites with higher filler loading. In that report, the highest dielectric permittivity reported by Luo *et al.*<sup>17</sup> for 56.8 vol.% BT-Ag hybrid particles filled into PVDF was 160 at 1 kHz. Moreover, the amount of filler in the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites was smaller than that in other materials described in the literature, and displayed better flexibility. In addition, compared with BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites, the dielectric permittivity of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites was increased

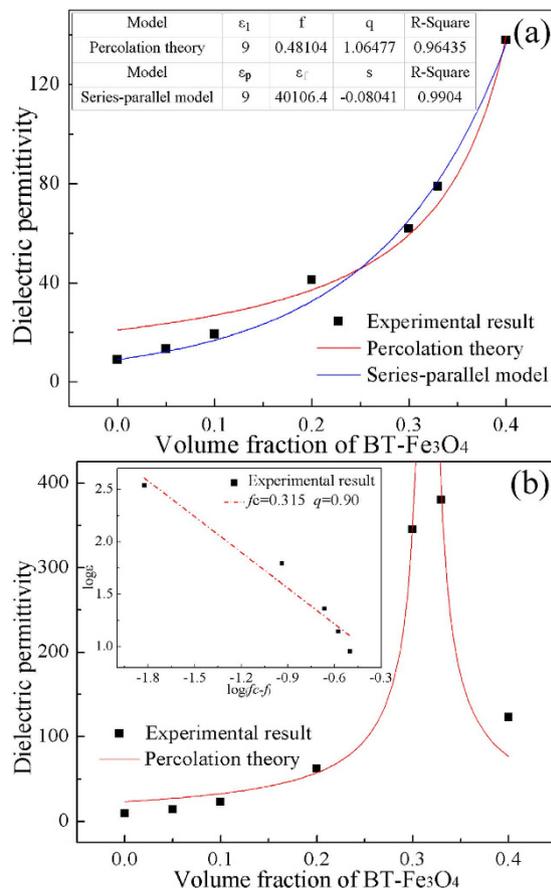

**Figure 7.** Experimental and theoretical dielectric permittivity of the (a) BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF and (b) BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites with various volume fractions of BT-Fe<sub>3</sub>O<sub>4</sub> at 100 Hz and room temperature.

greatly, and this result also indicated that the applied magnetic field can greatly affect the dielectric properties of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites.

The structure of the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles means that we can regard each particle as a unit. The classic percolation theory was used to predict the dielectric behavior of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites<sup>33</sup>. The dielectric behavior of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites yields to the classic percolation theory as below:


$$\epsilon = \epsilon_1 |(f_c - f) f_c|^{-q} \quad (1)$$

where  $\epsilon$  and  $\epsilon_1$  are the dielectric permittivity of the composites and PVDF matrix, respectively,  $f$  is the volume fraction of BT-Fe<sub>3</sub>O<sub>4</sub> and  $f_c$  is the percolation threshold,  $q$  is a critical exponent. As shown in Fig. 7a, the experimental results agreed well with the percolation theory when the volume fraction of the filler was greater than 10 vol.%. However, for volume fractions less than 10 vol.%, the fitting results deviate from the experimental data apparently, indicating that the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particle is not a real conducting phase in the composites. In this study, a series-parallel model was employed to estimate the permittivity of the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles<sup>4,18</sup>.

$$\epsilon^s = v_p \epsilon_p^s + v_f \epsilon_f^s, \quad (2)$$

here  $\epsilon$ ,  $\epsilon_p$ , and  $\epsilon_f$  are dielectric permittivity of the composites, PVDF matrix, and the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles, respectively,  $v_p$  and  $v_f$  are the volume fractions of the PVDF matrix and the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles, and the parameter  $s$  is the depolarization factor. As shown in Fig. 7a, the experimental results for the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites fit well with the series-parallel model. Moreover, we can find that the dielectric permittivity of BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles is 40106 at 100 Hz, which is over 10 times higher than that of the pure BT ( $\epsilon = 3000$ ). That is, the high dielectric permittivity of BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites is mainly attributed to the huge dielectric permittivity of BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles.

However, for the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites, it can be found that the percolation theory agrees well with the experimental results, though the fitting results also deviate from the experimental data at low volume fraction of BT-Fe<sub>3</sub>O<sub>4</sub> loading (see Fig. 7b). The fitting parameters  $f_c$  and  $q$  are 31.5 vol.% and 0.90, respectively. The linear fit of the log value of the dielectric permittivity and volume fraction also indicates that the dielectric permittivity fits well with percolation theory (see Fig. 7b inset). The inter-particle distance would decrease as the volume fraction of the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles increased, and that the probability of BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles coming

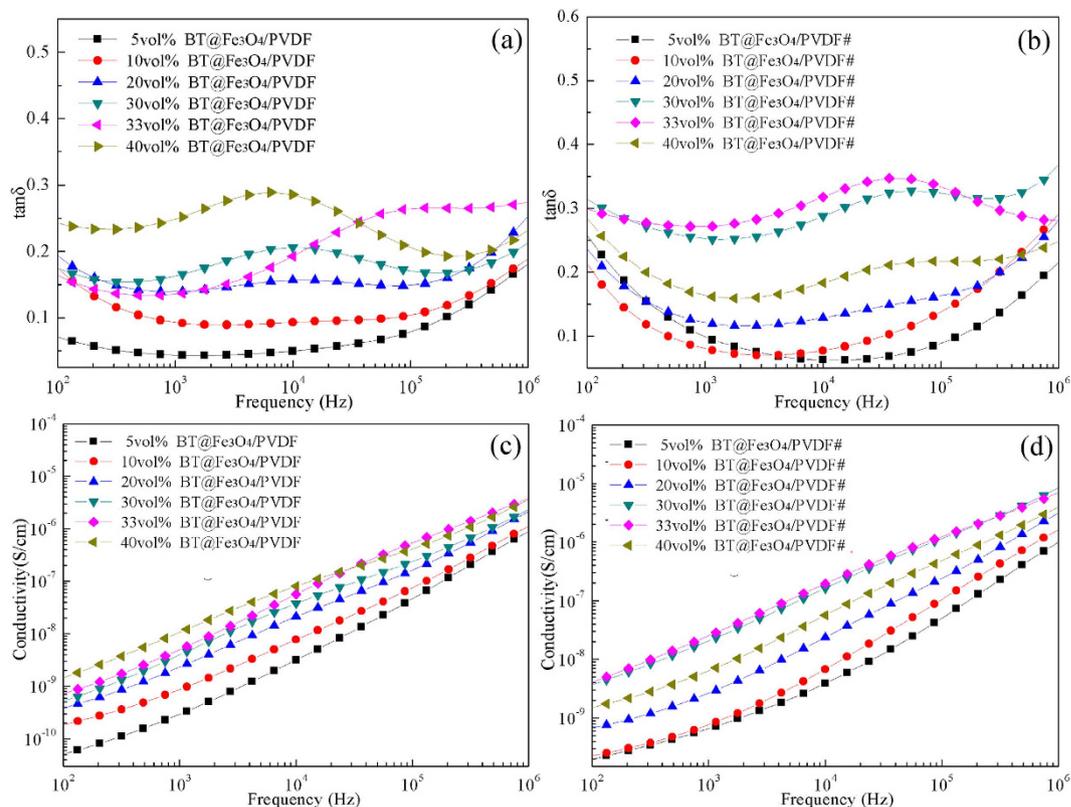

**Figure 8.** Dependence of dielectric loss of the (a) BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF composites and (b) BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites on frequency at room temperature. Dependence of conductivity of the (c) BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF composites and (d) BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites on frequency at room temperature.

into contact increased because of the high-intensity magnetic field (see Fig. 3b). Fe<sub>3</sub>O<sub>4</sub> with high conductivity can produce electrical current under an applied field and the charges will move and accumulate at the interface between the Fe<sub>3</sub>O<sub>4</sub> and PVDF matrix. The charge accumulation will result in enhanced polarization and dielectric response under the electric field. That is, the percolation effect was induced by the external magnetic field, which could effectively enhance the interfacial polarization of the BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF composites.

The energy loss due to the consumption of a dielectric material can be determined by the following equation:

$$W = \pi \epsilon \xi^2 f \tan \delta, \quad (9)$$

where  $\xi$  is the electric field strength and  $f$  is the frequency. For embedded capacitor applications, the dielectric loss is an essential parameter. The dielectric loss measured at a given frequency includes polarization loss and conduction loss<sup>19</sup>. The loss tangent as a function of frequency for the BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF composites is shown in Fig. 8a. It can be found that the dielectric loss remained low ( $\tan \delta < 0.3$ ) over the whole frequency range. The conduction loss is caused by charge flow through the composites, which depends on the electric conductivity of the composites. As shown in Fig. 8c, the conductivity of the composites with a filler loading of 5 vol.% remained low ( $5 \times 10^{-11}$  S/cm) because the absorbed insulating polymer chains act as the dielectric barrier governing the tunneling conduction and make it impossible for complete contact between the nanoparticle clusters<sup>34,35</sup>. The conductivity of the BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF composites increased as the BT–Fe<sub>3</sub>O<sub>4</sub> loading increased. The conductivity increased from  $5 \times 10^{-11}$  S/cm to  $1.4 \times 10^{-9}$  S/cm at 100 Hz, indicating that a conducting path was not formed in the composites, in agreement with the low dielectric loss (shown in Fig. 8a). As shown in Fig. 8b,d, a relatively low dielectric loss (0.3) and a low conductivity ( $4.12 \times 10^{-9}$  S/cm) were obtained when the volume fraction of BT–Fe<sub>3</sub>O<sub>4</sub> was 33 vol.%. Compared with the BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF composites, the BT–Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites exhibited a substantial increase of dielectric permittivity, a slight increase of dielectric loss as well as a slight increase of conductivity. In general, percolative composites can exhibit very high dielectric constants at the proper filler loading. However, these composites also exhibit a relatively high conductivity due to the insulator–conductor transition near the percolation threshold. In the present study, the insulating BT particles lower the probability of the Fe<sub>3</sub>O<sub>4</sub> particles coming into contact because they are discontinuous and discretely fixed on the BT surface. The BT–Fe<sub>3</sub>O<sub>4</sub> hybrid particles made it difficult for the Fe<sub>3</sub>O<sub>4</sub> particles to form a complete conductive network throughout the whole system, resulting in composites with high dielectric permittivity, low dielectric loss, and low conductivity.

## Conclusion

In summary, BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites with high dielectric permittivity, low dielectric loss, and low conductivity were obtained by annealing under an external magnetic field. TEM images showed that Fe<sub>3</sub>O<sub>4</sub> nanoparticles with an average size of 10–20 nm were discontinuously and discretely deposited on the BT surface. The magnetic field made the BT-Fe<sub>3</sub>O<sub>4</sub> particles move in the PVDF matrix and enhanced the probability of forming BT-Fe<sub>3</sub>O<sub>4</sub> clusters. The structure of the BT-Fe<sub>3</sub>O<sub>4</sub> suppressed the formation of a conducting path in the composites. The dielectric permittivity of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites increased following annealing under a magnetic field for 30 min at 60 °C, but the dielectric loss and conductivity remained low. The experimental results for the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites fit well with the series-parallel model, indicating that the enhanced dielectric permittivity of BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites is mainly attributed to the ultrahigh dielectric permittivity of BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles. However, the percolation effect was induced by the external magnetic field, which could effectively enhance the interfacial polarization of the BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF# composites. The high dielectric permittivity, low dielectric loss, and low conductivity of these composites make them suitable candidates for use in embedded devices in the electronics industry.

## Material and Methods

**Preparation of BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles.** BT-Fe<sub>3</sub>O<sub>4</sub> hybrid nanoparticles were prepared *via* a chemical precipitation method. 35 g of NaOH was dissolved in distilled water flowed by the addition of 20 g BT nanoparticles, the mixture was stirred vigorously for 20 min. FeSO<sub>4</sub>·7H<sub>2</sub>O and FeCl<sub>3</sub>·6H<sub>2</sub>O were dissolved into 50 mL distilled water, respectively, then mixed together according to the mole ratio (Fe<sup>3+</sup>:Fe<sup>2+</sup> = 2:1) and trickled into aqueous solution under vigorous stirring for 30 min at 40 °C. The pH of the aqueous solution was fixed at 11. The BT-Fe<sub>3</sub>O<sub>4</sub> suspension was obtained which was washed with distilled water until the pH reached 7. Finally, BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles were obtained by drying the suspension in a vacuum oven at 50 °C for 24 h.

**Preparation of BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF nanocomposites.** The BT-Fe<sub>3</sub>O<sub>4</sub> fillers and PVDF matrix were mixed thoroughly with a torque rheometer for 30 min at 180 °C and then molded by hot pressing at approximately 180 °C and 15 MPa for 15 min to generate BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites with a thickness of ≈200 μm and diameter of 4 cm. BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF composites with different volume fractions of BT-Fe<sub>3</sub>O<sub>4</sub> fillers were treated under a constant magnetic field with a magnetic induction density of 1.0 T for 30 min at 60 °C; henceforth, the composites treated by magnetic field will be referred to as BT-Fe<sub>3</sub>O<sub>4</sub>/PVDF#.

**Characterization.** The phase compositions of the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles and the PVDF composites were analyzed using X-ray diffraction (XRD, Empyrean) using Cu Kα radiation at 40 kV and 40 mA. The microstructure of the PVDF composites was determined using SEM (Hitachi S-3400N) and the BT-Fe<sub>3</sub>O<sub>4</sub> hybrid particles were analyzed using TEM (JEOL JEM-2100F). Prior to performing dielectric measurements, a thin layer of Al paste (diameter of 25 mm) was applied to the sides of the composites. The dielectric properties of the PVDF composites were determined in the frequency range of 100 Hz to 1 MHz at room temperature using a broadband dielectric spectral instrument (Novocontrol Alpha-A).

## References

- Dang, Z. M. *et al.* Fundamentals, processes and applications of high-permittivity polymer-matrix composites. *Prog. Mater. Sci.* **57**, 660–723 (2011).
- Rocio, P. O., Antonio, F. & Marks, T. J. High-k organic, inorganic, and hybrid dielectrics for low-voltage organic field-effect transistors. *Chem. Rev.* **110**, 205–239 (2010).
- Yang, K., Huang, X. Y., Fang, L. J., He, J. L. & Jiang, P. K. Fluoro-polymer functionalized graphene for flexible ferroelectric polymer-based high-k nanocomposites with suppressed dielectric loss and low percolation threshold. *Nanoscale* **61**, 4740–4753 (2014).
- Dang, Z. M., Yuan, J. K., Yao, S. H. & Liao, R. J. Flexible Nanodielectric Materials with High Permittivity for Power Energy Storage. *Adv. Mater.* **25**, 6334–6365 (2013).
- Yang, W. H., Yu, S. H., Sun, R. & Du, D. X. Nano- and microsize effect of CCTO fillers on the dielectric behavior of CCTO/PVDF composites. *Acta Mater.* **59**, 5593–5602 (2011).
- Yang, Y. *et al.* Polyimide/nanosized CaCu<sub>3</sub>Ti<sub>4</sub>O<sub>12</sub> functional hybrid films with high dielectric permittivity. *Appl. Phys. Lett.* **102**, 042904 (2013).
- Chi, Q. G. *et al.* Enhanced Dielectric Performance of Amorphous Calcium Copper Titanate/Polyimide Hybrid Film. *J. Mater. Chem. C* **2**, 172–177 (2014).
- Kim, P. *et al.* High energy density nanocomposites based on surface-modified BaTiO<sub>3</sub> and a ferroelectric polymer. *ACS Nano* **3**, 2581–2592 (2009).
- Mishra, P. & Kumar, P. Dielectric properties of 0.25(BZT-BCT) – 0.75[(1 – x)PVDF – xCCTO] (x = 0.02, 0.04, 0.06, 0.08 and 0.1) composites for embedded capacitor applications. *Compos. Sci. Technol.* **88**, 26–32 (2013).
- Yang, Z. X. *et al.* Controllable synthesis, characterization and photoluminescence properties of morphology-tunable CdS nanomaterials generated in thermal evaporation processes. *Appl. Surf. Sci.* **258**, 7343–7347 (2012).
- Cho, S. H., Lee, J. S. & Jang, J. Enhanced Crystallinity, Dielectric, and Energy Harvesting Performances of Surface-Treated Barium Titanate Hollow Nanospheres/PVDF Nanocomposites. *Adv. Mater. Interfaces* **2**, 1500098 (2015).
- Luo, H. *et al.* Improved Dielectric Properties and Energy Storage Density of P(VDF-HFP) Nanocomposite with Hydantoin Epoxy Resin Coated BaTiO<sub>3</sub>. *ACS Appl. Mater. Interfaces* **7**, 8061–8069 (2015).
- Fu, J. *et al.* Improving Dielectric Properties of PVDF Composites by Employing Surface Modified Strong Polarized BaTiO<sub>3</sub> Particles Derived by Molten Salt Method. *ACS Appl. Mater. Interfaces* **7**, 24480–24491 (2015).
- Li, Z. H. *et al.* Towards suppressing loss tangent: Effect of polydopamine coating layers on dielectric properties of core-shell barium titanate filled polyvinylidene fluoride composites. *Compos. Sci. Technol.* **118**, 198–206 (2015).
- Yang, W. H. *et al.* Electrical Modulus Analysis on the Ni/CCTO/PVDF System Near the Percolation Threshold. *J. Phys. D: Appl. Phys.* **44**, 475305–475312 (2011).
- Yu, C. R. *et al.* Electrical and dielectric properties of polypropylene nanocomposites based on carbon nanotubes and barium titanate nanoparticles. *Compos. Sci. Technol.* **71**, 1706–1712 (2011).
- Luo, S. B., Yu, S. H., Sun, R. & Wong, C. P. Nano Ag-deposited BaTiO<sub>3</sub> hybrid particles as fillers for polymeric dielectric composites: Toward high dielectric constant and suppressed loss. *ACS Appl. Mater. Interfaces* **6**, 176–182 (2013).

18. Fang, F., Yang, W. H., Yu, S. H., Luo, S. B. & Sun, R. Mechanism of High Dielectric Performance of Polymer Composites Induced by BaTiO<sub>3</sub>-supporting Ag Hybrid Fillers. *Appl. Phys. Lett.* **104**, 132909 (2014).
19. Yang, Y. *et al.* High performance of polyimide/CaCu<sub>3</sub>Ti<sub>4</sub>O<sub>12</sub>@Ag hybrid films with enhanced dielectric permittivity and low dielectric loss. *J. Mater. Chem. A* **3**, 4916–4921 (2015).
20. Chi, Q. G. *et al.* Nano iron oxide-deposited calcium copper titanate/polyimide hybrid films induced by an external magnetic field: toward a high dielectric constant and suppressed loss. *J. Mater. Chem. C*, doi: 10.1039/c6tc01655c (2016).
21. Xu, J. W., Florkowski, W., Gerhardt, R., Moon, K. S. & Wong, C. P. Shear Modulated Percolation in Carbon Nanotube Composites. *J. Phys. Chem. B* **110**, 12289–12292 (2006).
22. Obrzut, J., Douglas, J. F., Kharchenko, S. B. & Migler, K. Shear-Induced Conductor-Insulator Transition in Melt-Mixed Polypropylene-Carbon Nanotube Dispersions. *Phys. Rev. B* **76**, 195420 (2007).
23. Yuan, C. *et al.* Thermal Conductivity of Polymer-Based Composites with Magnetic Aligned Hexagonal Boron Nitride Platelets. *ACS Appl. Mater. Interfaces* **7**, 13000–13006 (2015).
24. Fang, F., Yang, W., Jia, C. & Luo, X. Polarization Enhancement for Poly(vinylidene fluoride-trifluoroethylene) 75/25 Copolymer Films by Interlayer Ordering under Cyclic Electric Field. *Appl. Phys. Lett.* **92**, 222906 (2008).
25. Panda, M., Srinivas, V. & Thakur, A. K. On the question of percolation threshold in polyvinylidene fluoride/nanocrystalline nickel composites. *Appl. Phys. Lett.* **92**, 132905 (2008).
26. Huang, X. Y., Jiang, P. K. & Xie, L. Y. Ferroelectric polymer/silver nanocomposites with high dielectric constant and high thermal conductivity. *Appl. Phys. Lett.* **95**, 242901 (2009).
27. Yu, K., Niu, Y. J., Zhou, Y. C., Bai, Y. Y. & Wang, H. Nanocomposites of Surface-Modified BaTiO<sub>3</sub> Nanoparticles Filled Ferroelectric Polymer with Enhanced Energy Density. *J. Am. Ceram. Soc.* **96**, 2519–2524 (2013).
28. Zhang, Z. C. *et al.* Enhancement of dielectric and electrical properties in BT/SiC/PVDF three-phase composite through microstructure tailoring. *Composites: Part A* **74**, 88–95 (2015).
29. Zha, J. W., Meng, X., Wang, D., Dang, Z. M. & Li, R. K. Y. Dielectric properties of poly(vinylidene fluoride) nanocomposites filled with surface coated BaTiO<sub>3</sub> by SnO<sub>2</sub> nanodots. *Appl. Phys. Lett.* **104**, 072906 (2014).
30. Wang, G. S. Enhanced dielectric properties of three-phase-percolative composites based on thermoplastic-ceramic matrix (BaTiO<sub>3</sub> + PVDF) and ZnO radial nanostructures. *ACS Appl. Mater. Interfaces* **2**, 1290–1293 (2010).
31. Liang, F., Zhang, L., Lu, W. Z., Wang, Q. X. & Fan, G. F. Dielectric performance of polymer-based composites containing core-shell Ag@TiO<sub>2</sub> nanoparticle fillers. *Appl. Phys. Lett.* **108**, 072902 (2016).
32. Zhou, W. Y., Chen, Q. G., Sui, X. Z., Dong, L. N. & Wang, Z. J. Enhanced thermal conductivity and dielectric properties of Al/ $\beta$ -SiC<sub>w</sub>/PVDF composites. *Composites: Part A* **71**, 184–191 (2015).
33. Nan, C. W., Shen, Y. & Ma, J. Physical Properties of Composites Near Percolation. *Annu. Rev. Mater. Res.* **40**, 131–151 (2010).
34. Park, J. & Lu, W. Orientation of core-shell nanoparticles in an electric field. *Appl. Phys. Lett.* **91**, 053113 (2007).
35. Balberg, I., Azulay, D., Trker, D. & Millo, O. Percolation and tunneling in composite materials. *Int. J. Mod. Phys. B* **18**, 2091 (2012).

## Acknowledgements

The authors gratefully acknowledge the support of the Heilongjiang Postdoctoral Science Foundation (LBH-TZ0515), the Open Research Fund of State Key Lab of Electrical Insulation and Power Equipment (EIPE15201).

## Author Contributions

C.Z. and Q.C. conceived the experiments; C.Z. and J.D. conducted the experiments and prepared Figures in all paper; C.Z. and Q.C. analyzed the results and wrote the manuscript; All the authors discuss the results and commented on the manuscript.

## Additional Information

**Competing financial interests:** The authors declare no competing financial interests.

**How to cite this article:** Zhang, C. *et al.* Enhanced dielectric properties of poly(vinylidene fluoride) composites filled with nano iron oxide-deposited barium titanate hybrid particles. *Sci. Rep.* **6**, 33508; doi: 10.1038/srep33508 (2016).



This work is licensed under a Creative Commons Attribution 4.0 International License. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in the credit line; if the material is not included under the Creative Commons license, users will need to obtain permission from the license holder to reproduce the material. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>

© The Author(s) 2016