

<https://doi.org/10.1038/s41545-024-00365-y>

Longitudinal study on the multifactorial public health risks associated with sewage reclamation

Check for updates

Inés Girón-Guzmán¹, Santiago Sánchez-Alberola^{1,2}, Enric Cuevas-Ferrando¹✉, Irene Falcó^{1,3}, Azahara Díaz-Reolid¹, Pablo Puchades-Colera¹, Sandra Ballesteros⁴, Alba Pérez-Cataluña¹, José María Coll¹, Eugenia Núñez^{1,2}, María José Fabra^{1,2}, Amparo López-Rubio^{1,2,5} & Gloria Sánchez^{1,5}

This year-long research analyzed emerging risks in influent, effluent wastewaters and biosolids from six wastewater treatment plants in Spain's Valencian Region. Specifically, it focused on human enteric and respiratory viruses, bacterial and viral faecal contamination indicators, extended-spectrum beta-lactamases-producing *Escherichia coli*, and antibiotic-resistance genes. Additionally, particles and microplastics in biosolid and wastewater samples were assessed. Human enteric viruses were prevalent in influent wastewater, with limited post-treatment reduction. Wastewater treatment effectively eliminated respiratory viruses, except for low levels of SARS-CoV-2 in effluent and biosolid samples, suggesting minimal public health risk. Antibiotic resistance genes and microplastics were persistently found in effluent and biosolids, thus indicating treatment inefficiencies and potential environmental dissemination. This multifaceted research sheds light on diverse contaminants present after water reclamation, emphasizing the interconnectedness of human, animal, and environmental health in wastewater management. It underscores the need for a One Health approach to address the United Nations Sustainable Development Goals.

Water is a fundamental resource for human life, being also essential for crops and livestock production. However, the increasing global population and limited freshwater resources pose significant challenges to meeting the demands of various sectors, including agriculture. Water reuse has emerged as a sustainable solution to preserve freshwater resources and reduce environmental pressure. Reclaimed water, also known as recycled water or effluent from wastewater treatment plants (WWTPs), refers to the treated wastewater that undergoes a series of physical, chemical, and biological processes to remove contaminants and pathogens. The reclaimed water is then suitable for non-potable uses, such as irrigation, industrial processes, and groundwater recharge according to national regulations¹.

Water reuse has become increasingly important in agriculture due to the limited freshwater resources and the growing demand for food production. Agriculture accounts for approximately 70% of global freshwater withdrawals and the water demand for crops and livestock is projected to increase in the coming decades². Reclaimed water offers a sustainable solution to reduce the demand for freshwater resources and ensure the

availability of water for irrigation while reducing the discharge of treated wastewater into the environment and the cost of water supply. However, water reuse also poses several challenges, particularly in terms of microbiological and chemical safety. Reclaimed water may contain a variety of contaminants, including bacteria, viruses, protozoa, and emerging pollutants, such as microplastics (MPs), antibiotic resistant genes (ARGs), and pharmaceuticals³.

In particular, human enteric viruses are responsible for causing viral gastroenteritis, hepatitis, and various illnesses primarily transmitted through the faecal-oral route⁴. The spread of these viruses is primarily linked to person-to-person contact and the consumption of contaminated food and water. Enteric viruses are excreted in substantial quantities, up to 10^{13} particles per gram of stool, by both symptomatic and asymptomatic individuals^{5,6}. Major causative agents of waterborne viral gastroenteritis and hepatitis outbreaks worldwide include rotaviruses (RVs), norovirus genogroups I (HuNoV GI) and II (HuNoV GII), hepatitis A and E viruses (HAV and HEV), and human astroviruses⁵ (HAstVs). In this context, and

¹Institute of Agrochemistry and Food Technology, IATA-CSIC, Paterna, Valencia, Spain. ²Interdisciplinary Platform for Sustainable Plastics towards a Circular Economy – Spanish National Research Council (SusPlast), CSIC, Madrid, Spain. ³Department of Microbiology and Ecology, University of Valencia, Burjassot, Valencia, Spain. ⁴Department of Genetics and Microbiology, Faculty of Biosciences, Universitat Autònoma de Barcelona, Cerdanyola del Vallès, Barcelona, Spain. ⁵These authors jointly supervised this work: Amparo López-Rubio, Gloria Sánchez. ✉e-mail: enric.cuevas@iata.csic.es

related to microbiological risks dissemination, a new European regulation (EC, 2020/741) on minimum quality criteria (MQR) for water reuse is in place since June 2023, outlining the guidelines for the use of reclaimed water for agricultural irrigation⁷. However, questions have arisen concerning potential non-compliance scenarios in European water reuse systems^{8–12}. According to EC 2020/741 regulation, validation monitoring needs to assess whether the performance targets reductions are met. Monitoring of pathogen elimination in the water reclamation process is necessary to assess the suitability of reclaimed water in its secondary uses. In this respect, the WHO has suggested that another problem to be tackled in the framework of “One Health” is the rise of antibiotic resistance (AR)¹³. AR is frequent in places where antibiotics are employed, but antibiotic resistant bacteria (ARB) and ARGs are also widely prevalent in water environments^{14,15}. According to several reports, surface water and reclaimed wastewater used for irrigation are significant sources of ARBs and ARGs¹⁶. Due to inadequate removal of ARGs, which are crucial in the growth of extremely unfavourable drug-resistant superbugs, reuse of WWTP effluents may be harmful to human health¹⁷.

On the other hand, plastic pollution is currently one of the most important environmental problems that humanity must face. The exponential growth of plastic production since 1950s (up to 368 million of tons were produced in 2019) and the massive use of plastics, together with insufficient/inadequate waste management/disposal strategies, are the main causes of the global presence of plastics in every environmental compartment¹⁸. The European Commission has recently published an amending Annex to Regulation (EC) No 1907/2006 concerning the Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH) as regards synthetic polymer microparticles, where the intentional use of microplastics in commercial products is prohibited¹⁹.

Current research is showing that one of the main concerns about plastics, apart from the fact that they persist in the environment for an extremely long time, is their constant fragmentation into even smaller particles called microplastics (MPs, 1 µm–5 mm) or nanoplastics (< 1 µm), depending on their final dimensions, though they are also released as such²⁰.

MPs are emerging global threats as they can end up in our bodies through water and food ingestion or by air inhalation²¹. The larger MPs can cause mechanical damage to the intestinal epithelium, while the smaller particles can cross the epithelial barrier²² and end up in the lung²³, colon²⁴, placenta²⁵, and even blood²⁶.

MPs can transport pathogens over long distances, due to their ability to harbor biofilms on the surface, which can lead to the spread of pathogenic viruses and bacteria to new areas where they were not previously found²⁷. Another of the main risks associated with MPs is that plastic materials include approximately 4% by weight of additives²⁸, some of them declared as possible human carcinogens, and most of them considered endocrine disruptors²⁹. In addition, MPs also contain traces of persistent organic pollutants (COPs), such as polychlorinated biphenyls (PCBs), polycyclic aromatic hydrocarbons (PAHs), and organochlorine pesticides²².

It is important to highlight that depending on the performance of WWTPs high amounts of pathogens, MPs and ARGs can be released on a daily basis into rivers, lakes, and oceans^{9,14,30}. On the other hand, the sludge generated as well as the effluent water from the WWTPs are generally used in agriculture as a fertilizer and for irrigation respectively, and, therefore, the presence of emerging contaminants in these biosolids and reclaimed waters can favour the propagation of plastic particles, emerging pathogens, and ARGs through agricultural soils which could reach cultivated vegetables and ultimately the human body through the trophic chain.

In overall terms, understanding the distinct risk factors involved in the water reclamation process is critical to ensuring the safety of water reuse in agriculture and other sectors, and the analysis of the water reclamation process can serve as an important risk assessment tool. Moreover, by analysing wastewater, we gain valuable insights into the collective health of a community, as it contains traces of chemical pollutants, pathogens, and biomarkers from human and animal sources. Thus, monitoring wastewater helps identifying trends in the prevalence of diseases, antibiotic resistance patterns, zoonotic pathogens, and exposure to environmental pollutants as MPs, providing early warning and valuable data for public health interventions. This integration of environmental, human, and animal health data underscores the significance of wastewater analysis in promoting a comprehensive and proactive “One Health” approach to public health and the well-being of both the planet and its inhabitants.

Results


Incidence of human enteric viruses, respiratory viruses, and viral faecal indicators in influent and effluent wastewater samples

The presence of human enteric viruses, including HuNoV GI, HuNoV GII, HAstV, HAV, HEV, and RV, was analysed, along with novel viral faecal contamination indicators pepper mild mottle virus (PMMoV), crAssphage and somatic coliphages in influent, effluent and biosolid samples from six different WWTPs in the Valencian region of Spain (Figs. 1 and 2).

In influent wastewater samples, the mean highest levels of viruses were observed for RV (8.55 log genome copies, GC/L), followed by HuNoV GII (7.80 log GC/L) and HAstV (7.72 log GC/L). The lowest concentration levels were detected for HuNoV GI (4.46 log GC/L), HEV (4.13 log GC/L), and HAV (3.47 log GC/L) (Fig. 2). HAV was only detected in 4 out of 72 influent wastewater samples (Fig. 1). PMMoV and crAssphage were detected in all influent samples, with mean levels of 5.95 log GC/L and 8.44 log GC/L, respectively.

In the effluent wastewater samples, the titres of all viruses decreased after the water reclamation process. HuNoV GI, HuNoV GII, HAstV, and RV showed mean concentrations titers of 3.51, 6.25, 6.35, and 7.69 Log GC/L when detected, respectively (Fig. 2). On the contrary, HEV was not detected in any of the effluent samples. In the case of faecal viral indicators, PMMoV (4.72 Log GC/L) and crAssphage (6.23 Log GC/L) were present in

Fig. 1 | Prevalence of human enteric viruses (%) and human faecal contamination viral indicators in influent (I), effluent (E), and biosolid (S) samples collected from six different WWTPs (P1–P6). HEV hepatitis E virus, HAV hepatitis A virus, HAstV human astrovirus, RV rotavirus, PMMoV pepper mild mottle virus.

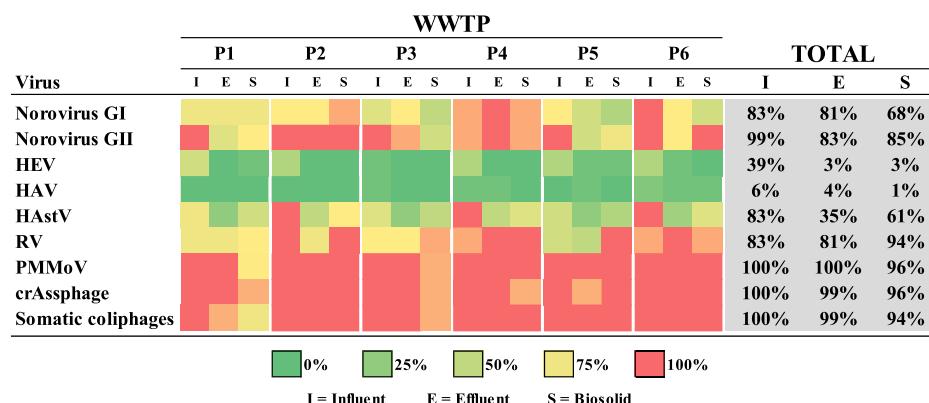

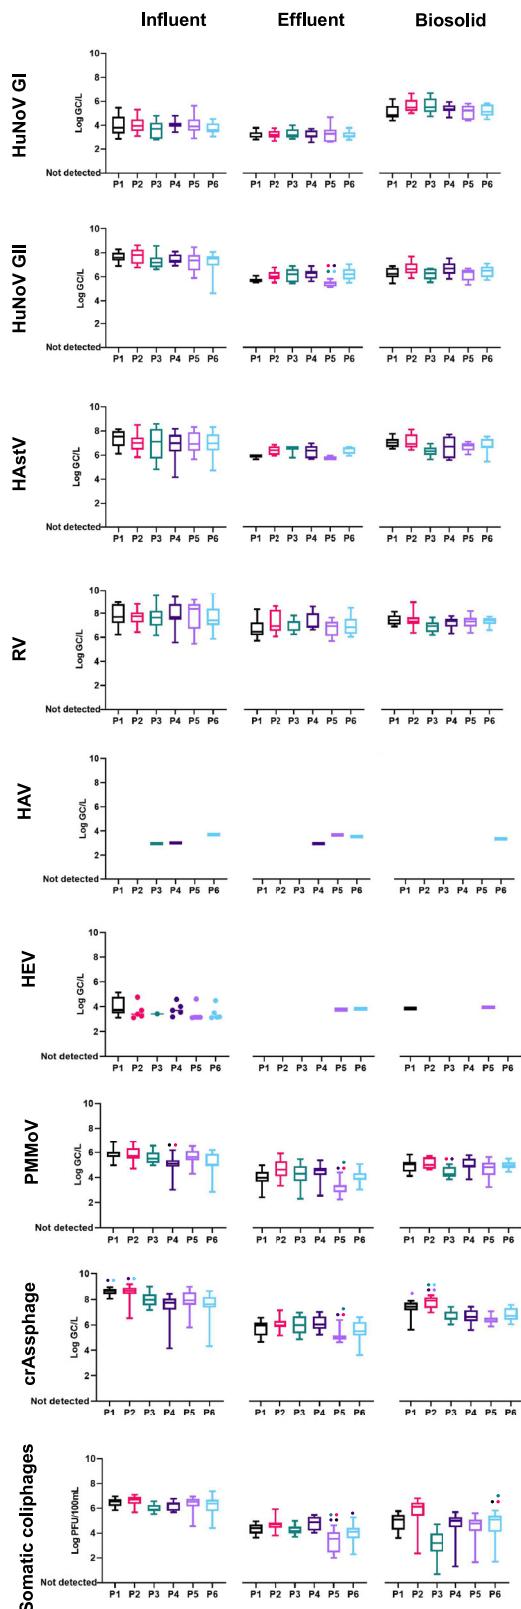


Fig. 2 | Mean concentrations of human enteric viruses (when detected) and viral human faecal contamination indicators in influent wastewater, effluent wastewater, and biosolid samples in each of the six WWTPs analysed (P1 - P6).

Whiskers in box are drawn min. to max., box extends from the 25th to 75th percentiles, and line within the box represents the median. Coloured circles above a box indicate significant differences between that box and the box with that same colour ($p < 0.05$). GC genome copies, PFU plate forming units, RV rotavirus, HuNoV human norovirus, HAstV human astrovirus, HAV hepatitis A virus, HEV hepatitis E virus, PMMoV pepper mild mottle virus.

all effluent samples. The highest reduction in virus levels were observed for HEV, with a reduction of 4 Log GC/L, even though the vast majority of viruses' reduction levels were below 2 Logs GC/L (Supplementary Fig. 1). Interestingly, viable somatic coliphages were found at levels of 4.73 Log plaque forming units (PFU)/100 mL in effluent waters, with a mean reduction of 1.83 Log PFU/100 mL compared to the influent waters (6.54 Log PFU/100 mL) when testing positive.

As for biosolid samples, HuNoV GI, HuNoV GII, HAstV, and RV showed the highest mean concentrations, with titers ranging from 5.37 (HuNoV GI) to 7.27 Log GC/L (RV) when detected (Fig. 2). HAV and HEV rendered lower mean concentrations of 3.24 and 3.91 Log GC/L, respectively. Besides, proposed viral faecal indicators yielded mean concentrations levels of 7.06 Log GC/L for crAssphage, 4.85 Log GC/L for PMMoV. and 5.63 Log PFU/100 mL for somatic coliphages (Fig. 2).

Regarding respiratory viruses, respiratory syncytial virus (RSV) showed a remarkable seasonality, with almost all positive samples being collected on November and December 2022 (Fig. 3). Influenza A virus (IAV) was intermittently detected over the year, with the most noteworthy peaks taking place in spring and winter (Fig. 3). Finally, SARS-CoV-2 was present in 99% and 32% of the influent and effluent samples, respectively. When testing positive, mean concentration values for RSV, IAV, and SARS-CoV-2 were 4.57, 6.20, and 5.27 Log GC/L, respectively. Notably, any of the analysed effluent wastewater samples tested positive for either RSV or IAV.

Regarding biosolid samples, SARS-CoV-2 was found positive in 71% of the samples at a mean concentration of 4.44 Log GC/L, while RSV and IAV only tested positive in three biosolid samples.

In general, no significant differences were found among the six different WWTPs analysed neither for enteric or respiratory viruses.

Quantification of *Escherichia coli*, Extended Spectrum Beta-Lactamases-producing *E. coli*, and ARGs in wastewater and biosolids samples

In influent wastewater samples, the mean concentration of *E. coli* and ESBL-*E. coli* were 7.08 Log colony forming units (CFU)/100 mL and 6.19 Log CFU/100 mL, respectively (Fig. 4). After the wastewater treatment process, the mean concentrations of *E. coli*, and ESBL-*E. coli* in the effluent wastewater samples were significantly reduced, with mean concentrations of 5.43 Log CFU/100 mL, and 4.76 Log CFU/100 mL, respectively.

Regarding biosolid samples, the mean concentration of *E. coli* was 5.64 Log CFU/100 mL, while ESBL-*E. coli* yielded a mean concentration of 4.89 Log CFU/100 mL.

Furthermore, a deeper analysis of the ARGs present in effluent and biosolids samples was performed due to the high levels of ESBL-*E. coli* in biosolids and the observed low performance of the water reclamation process (less than 2 log reduction; Fig. 4). ARGs including *tetPB_3*, *tetA_1*, and *qacA_1* were not detected in effluent wastewater and biosolids. ARG *sul1_1*, *sul2_1*, *ppb2b*, *bla_{CTX-M}*, *cmlA_2*, *nimE*, and *ermB* were detected in effluent samples at mean concentrations of 9.20, 8.78, 8.57, 8.42, 8.31, 8.24, and 8.39 Log GC/100 mL, respectively (Fig. 5).

ARGs were identified in biosolids, with the following values: 9.87, 9.25, 8.58, 8.42, 8.50, 8.64, 8.28 Log GC/100 mL for *sul1_1*, *sul2_1*, *ppb2b*, *bla_{CTX-M}*, *cmlA_2*, *ermB*, and *ermA*, respectively. Notably, *nime* was not found in any of analysed biosolids.

Quantification of particles and microplastics present in biosolids and reclaimed water samples

The presence of solid particles and microplastics was bi-monthly analysed in both influent and effluent wastewater samples. In general, a great reduction in both the number of particles between 1 μ m and 5 mm or (T)-P and particles larger than 300 μ m or (S)-P was observed after the wastewater treatment process (Fig. 6). Although there was not a clear effect derived from seasonality, WWTPs were slightly less efficient in removing (T)-P in January and March.


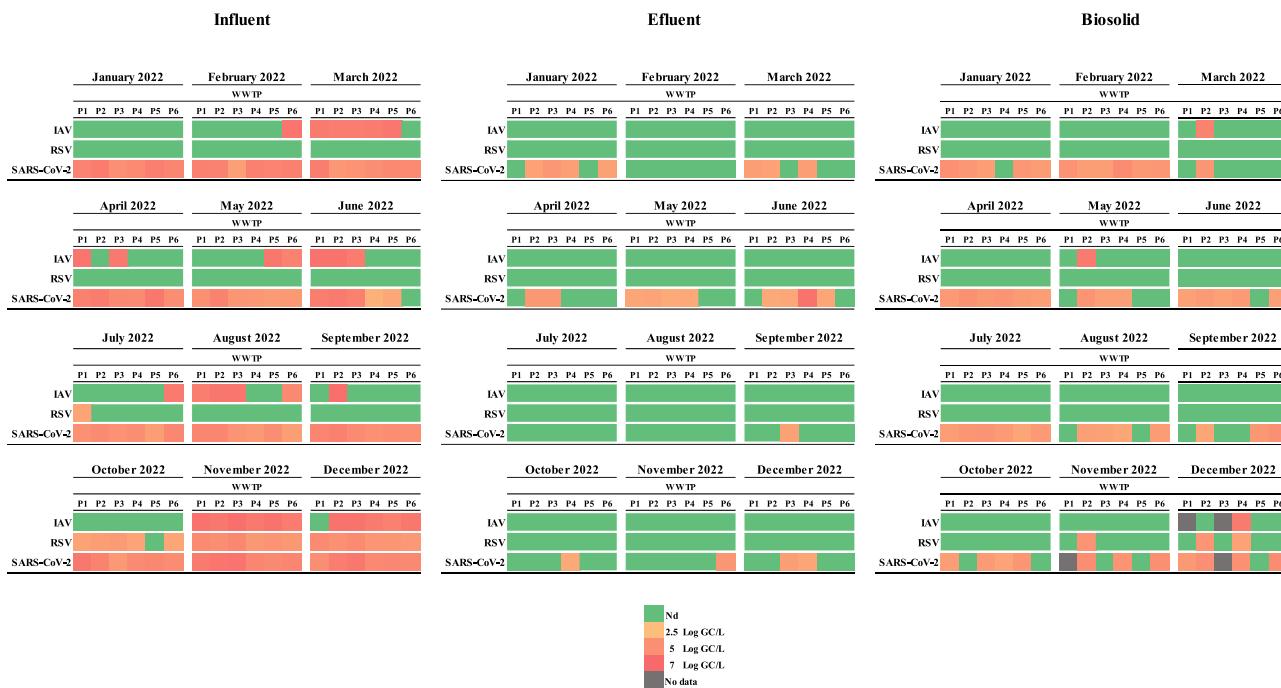


Fig. 3 | Concentration (in Log GC/L) of RSV, IAV, and SARS-CoV-2 in influent, effluent, and biosolid samples collected over a one-year period in six different WWTPs (P1-P6). Nd not detected, GC genome copies, SARS-CoV-2 severe acute respiratory syndrome coronavirus 2, RSV respiratory syncytial virus, IA Influenza A virus.


Fig. 4 | Levels of *Escherichia coli* and ESBL-*E. coli* in influent, effluent, and biosolid samples in each of the six WWTPs analysed (P1-P6). Whiskers in box are drawn min. to max., box extends from the 25th to 75th percentiles, and the line within the box represents the median. Coloured circles above a box indicate significant differences between that box and the box with that same colour ($p < 0.05$). CFU colony forming unit ESBL-*E. coli* extended spectrum beta-lactamases producing *Escherichia coli*.

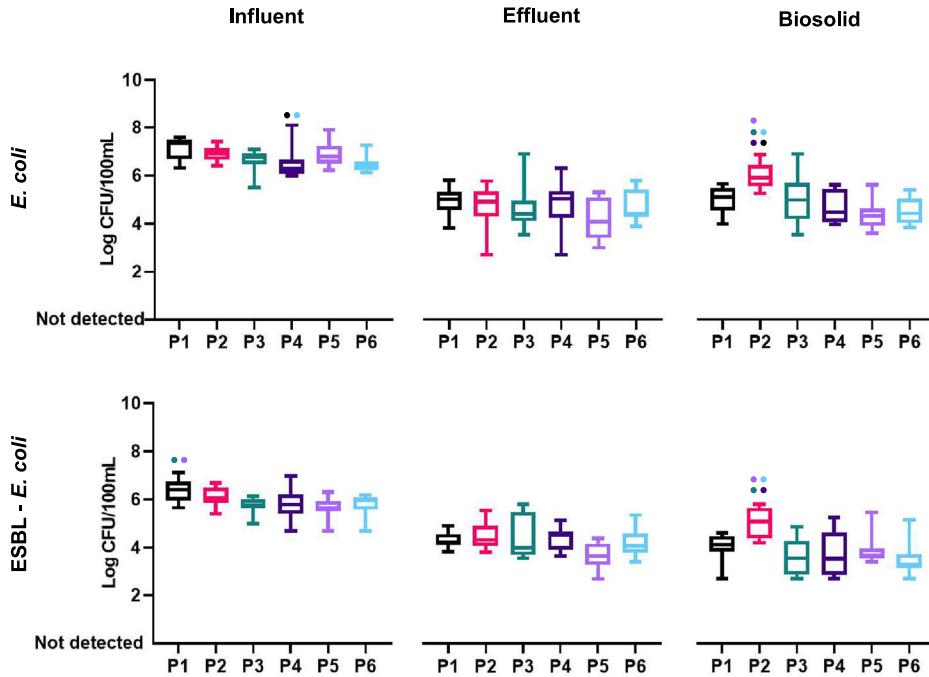

The efficiency of each WWTPs regarding the reduction of (T)-P and (S)-P particles was determined considering the average number of particles in the influent and effluent wastewater samples (Fig. 7). At the WWTP level, the calculated efficiency in (T)-P reduction was approximately 84, 68, 69, 46, 80 and 71%, for the different WWTPs (P1-P6) samples analysed. Notably, the efficiency in removing (S)-P was higher than in removing (T)-P, with the most noteworthy reduction taking place for P2 and P6 wastewater samples (91 and 93% approximately, and respectively), while the lowest efficiency in (T)-P reduction was approximately 40% for P5.

Once (T)-P and (S)-P particles were quantified, all samples were spectroscopically characterized in order to identify the presence of MPs derived from synthetic polymer particles, fibres, and films. In general terms, the highest reduction was observed in (S)-MPs as compared to (T)-MPs, thus suggesting the lower efficiency of wastewater treatments in removing microplastics smaller than 300 μm (Fig. 7). It should be highlighted that the efficiency of WWTPs for removing MPs of smaller particle size or (T)-MPs was lower than for removing all solid particles or (T)-P, being 59% the highest (T)-MPs efficiency (sample P6). In general, a higher efficiency in

Fig. 5 | Levels of different ARGs in effluent wastewater (in Log GC/100 mL) and biosolids (in Log GC/g) samples for each of the six WWTPs analysed (P1-P6). Each different symbol type represents a different WWTP. ND Not detected, MLSB Macrolide-lincosamide-streptogramin B group antibiotics, GC genome copies.

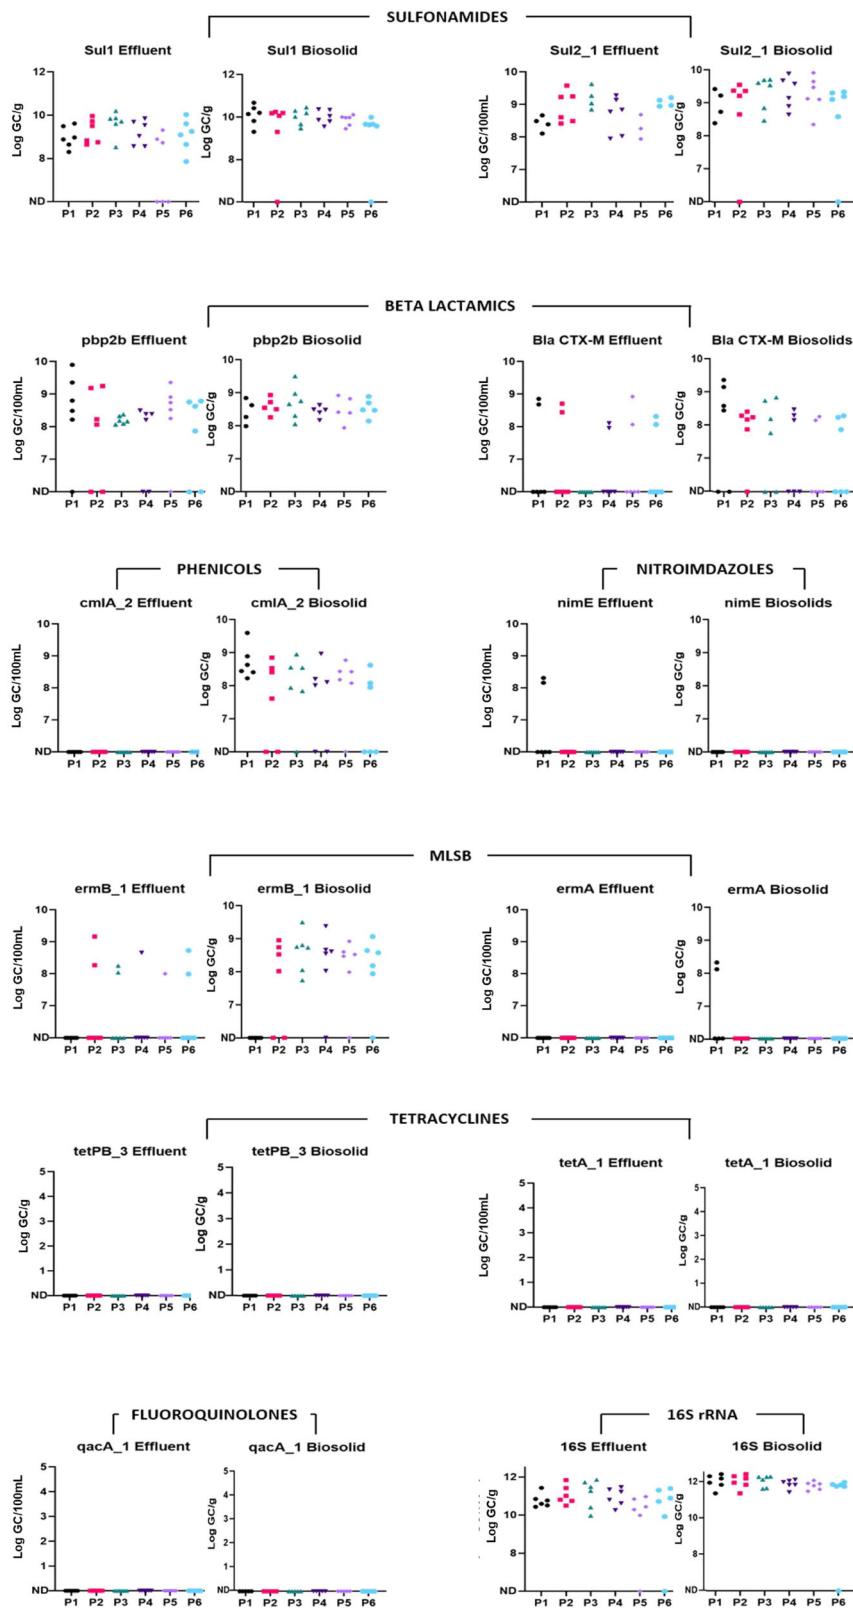

reducing (S)-MPs was observed (around 98–100%) in all samples, except in P2 (77%) (Fig. 7).

Considering the pre-treatment (T), the annual average MPs concentration in influent samples was around 1816 MPs/L which was slightly reduced in effluent samples (1724 MPs/L). In contrast, the annual average concentration of (S)-MPs (larger than 300 μ m) in influent samples was 198

MPs/L and it was significantly reduced in effluent wastewater samples until 11 MPs/L in average (Fig. 8).

The annual average percentage of MPs with respect to all solid particles in influent and effluent wastewater samples and biosolids was also determined (Supplementary Fig. 2). It is worth mentioning that, regarding the particles larger than 300 μ m, the MPs/all solid particles ratio in biosolid

Fig. 6 | Levels of microplastics in wastewater samples. Concentration (log P/L) of total particles (T)-P and sieved particles (>300 µm, (S)-P) in influent and effluent wastewater samples in even months over a one-year period in six different WWTPs (P1-P6).

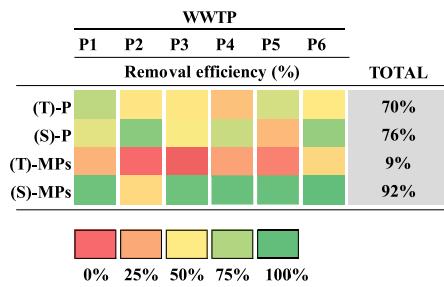
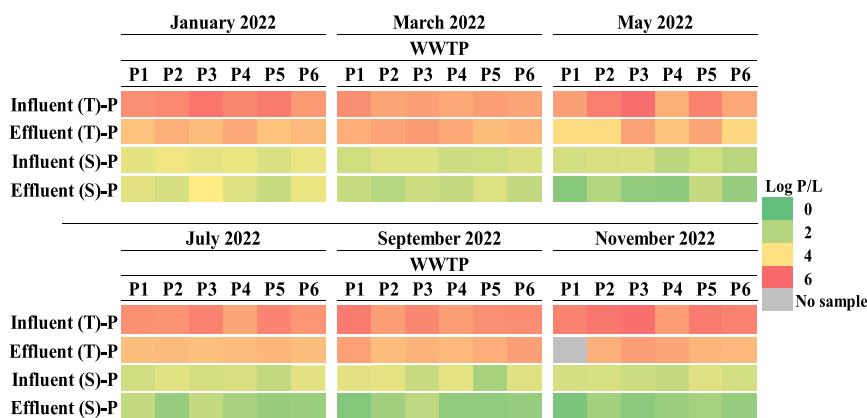


Fig. 7 | Efficiency of WWTPs for microplastics removal. Removal efficiency (%) of all solid particles (P) and microplastics (MPs) between influent and effluent samples collected from six different WWTPs (P1-P6) after both pre-treatment protocols. Total Particles (T) and Sieved > 300 µm (S).

samples was similar to the MPs/all solid particles ratio in influent wastewater samples, reaching values up to 35 in some of the WWTPs (Supplementary Fig. 2).

In all the analysed biosolid samples a significant number of (S)-P was also detected, and no significant effects due to seasonality were found (Fig. 9). The average highest concentration of (S)-MPs was 122 MP/g and 99 MP/g for P1 and P2, respectively. In contrast, the lowest level of MPs was detected for P3 (23 MP/g) (Supplementary Fig. 3).

Analysing the morphology and type of MPs identified in the WWTPs samples may help to understand the origin of water pollution (Supplementary Figs. 5 and 6). As depicted in Fig. 10, the majority of MPs existing in influent wastewater samples had the shape of fragments (~86%), percentage that was further increased in effluent wastewater samples. The percentage of particles identified as films was negligible both in influent or effluent samples. Most of the MPs found in influent samples were between 0 and 100 µm (~61%) in size, percentage that was increased in effluents (up to 73%), and a small fraction of MPs (~3-5%) were larger than 300 µm in size, in agreement with the results commented above (Fig. 8). It is hypothesized that, during sieving, particles smaller than 300 µm may aggregate and become retained, but following oxidative digestion, they break down into smaller particles. The composition of the MPs was dominated by common polymers, whereas the PS, PA, PVC, and PET were greatly decreased in effluent samples (Fig. 10). It is worth mentioning that the distribution of polymer type was quite different when comparing wastewater and biosolids samples. PE was dominant in all samples, accounting for 56, 46 and 57% of the total MPs, for wastewater (T)-MPs and (S)-MPs, and for biosolids (S)-MPs, respectively (Supplementary Fig. 4). The amount of PA was more than two-fold higher in (T)-MPs samples from wastewater than in (S)-MPs from biosolids (31% vs. 12%, respectively). PET represented around 21–28% of the (S)-MPs in wastewater

and biosolid samples. Other polymers such as PS, polytetrafluoroethylene PTFE, PVC, and PS were detected in lower amounts.

Discussion

Reuse of effluent wastewater and biosolids in agriculture is essential to face the increasing demand of water and agricultural products in combination with global warming and water scarcity³¹. Effluent wastewater and biosolids, however, are sources of emerging contaminants of concern such as viral pathogens, antibiotic resistance genes, and microplastics. The reuse of water and the release of reclaimed water into the environment may compromise public health due to the combination of several risk factors. In recent years, several publications have pointed out the low efficiency of WWTPs in removing viral pathogens⁹. While decay rates of human enteric viruses in effluents wastewater samples are frequently studied, very few studies have reported the incidence of respiratory viruses, MPs, and ARGs in effluent wastewater and biosolids, with the potential of being used in agriculture.

The present study investigated the presence of human enteric viruses, including HuNoV GI and GII, HAstV, HEV, and RV, as well as ARBs, ARGs, MPs and two novel viral faecal contamination indicators (PMMoV and crAssphage) in influent, effluent and biosolids samples. Consistent with findings from earlier research, influent wastewater samples exhibited elevated concentrations of human enteric viruses, MPs and ARBs^{14,32} (Figs. 1, 2, 4, 6, and 8).

Following the water reclamation process, the concentrations of all analysed viruses decreased in the effluent samples. However, it is worth noting that the reductions for HuNoV GI, HuNoV GII, HAstV, and RV (when detected in effluent) were below 2 Logs, suggesting the persistence of these viruses to a relevant extent after being exposed to either UV or chlorination treatments. Only HEV was not detected in any of the analysed effluent samples thus resulting in higher reductions (> 4 Log GC). The reductions observed for human enteric viruses along the year substantially differ from current European legislation (Regulation (EU) 2020/741, 2020) on water reuse, which indicates the need for ≥ 6 Log decreases on the presence of these pathogens⁷. Even though enteric viruses' presence detected by RT-qPCR in this study might not correspond with infectious particles, several publications have pointed out the presence of infectious enteric viruses in reclaimed waters by capsid-integrity or cell culture approaches^{8-11,33}.

Owing to the microbiological risk that the presence of enteric viruses in these waters could entail, this study also aimed to assess the levels of somatic coliphages and *E. coli* in influent and effluent wastewater samples, as well as biosolid samples. Coliphages have been found in locations where faecal contamination is present^{34,35}, and numerous studies have suggested utilizing coliphages as markers for enteric viruses' presence³⁴⁻³⁹. Following the water treatment process, reductions of 1.83 Log PFU and 1.65 Log CFU were observed for somatic coliphages and *E.*


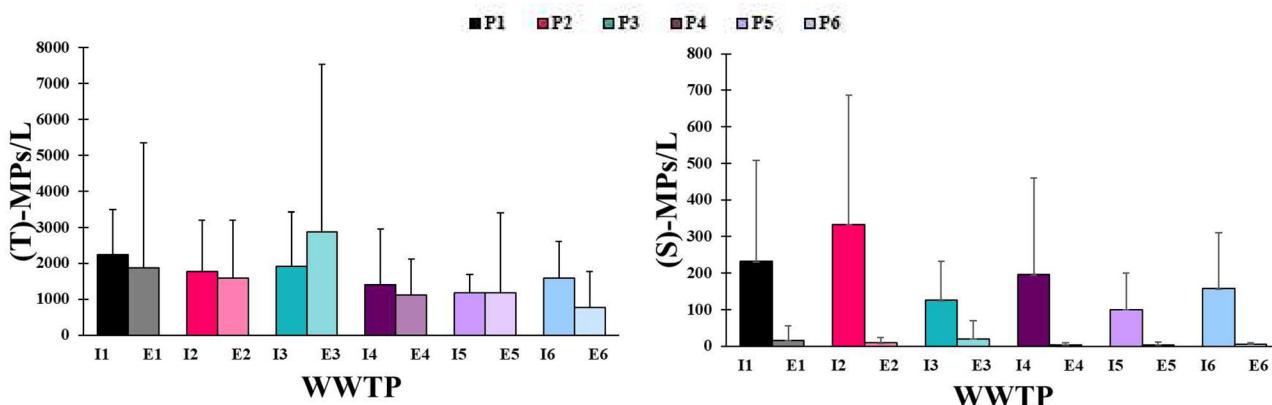


Fig. 8 | Annual concentration of microplastics (MPs). Average concentration (mean + standard deviation) of MPs in influent (I) and effluent (E) after (T) (left) and (S) (right) protocols collected from six different WWTPs. T total particles, S sieved > 300 μ m.

Fig. 9 | Levels of microplastics (MPs) in biosolids.

Concentration (in log/g) of (S)-P and (S)-MPs in biosolids in even months over a one-year period in six different WWTPs (P1-P6).

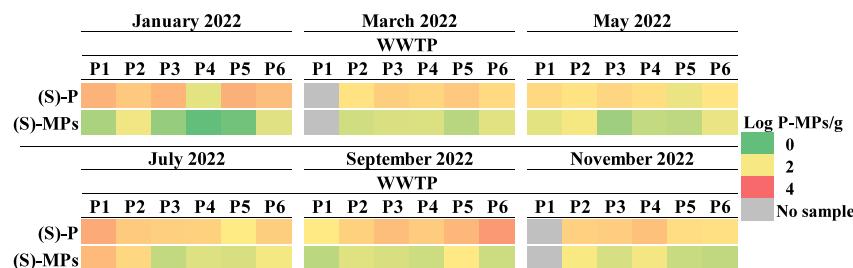

coli, respectively. These reductions, which are far from those stipulated by the legislation EU 2020/741, 2020, highlight the low performance of the investigated WWTPs in decreasing the microbial load and mitigating the potential risks associated with these pathogens (pathogenicity and antibiotic resistance transmission)⁷. The high prevalence of viruses in reclaimed waters and biosolids, attributed to their high stability, poses a significant risk when applied to agricultural fields, particularly for products such as leafy greens and berries, which are often consumed raw and are unlikely to undergo extensive processing⁴⁰. Shellfish are highly susceptible to viral contamination due to their efficient water filtration capacity, and they are commonly consumed raw or with minimal processing, making them a potential source of viral outbreak.


For somatic coliphages and *E. coli*, obtained counts in biosolids were similar to those obtained in effluent wastewater samples, pointing out the risk of using biosolids without any further treatment in agriculture. Besides, in recent years, both crAssphage and PMMoV have been proposed as viral indicators of faecal contamination in water bodies and as a virus model to assess the performance of WWTPs⁴¹⁻⁴⁷. Regarding effluent samples, the mean concentration of crAssphage detected in reclaimed waters was 6.25 Log GC/L, which consistently matches the reported mean concentrations of 6.5 Log GC/L in high-income countries as reviewed by Adnan et al.⁴⁸. PMMoV concentrations in effluent wastewater samples are in line with existing bibliography, which reports mean concentration values of ~ 4 Log GC/L⁴⁹⁻⁵¹. Notably, obtained mean concentrations of PMMoV in influent wastewater (5.95 Log GC/L) are slightly under-average when compared with previously reported data, as the common concentration values of PMMoV published in influent wastewater samples range from 6 to 10 Log GC/L⁴⁹⁻⁵⁵. Interestingly, to our knowledge, this study includes the first report on PMMoV levels in biosolid samples. This finding suggests a potential risk for the dissemination of this plant pathogen, which can infect solanaceous plants, ultimately leading to reduced productivity.

As for respiratory viruses, SARS-CoV-2, and IAV were detected at mean titres similar to those reported in the US, Canada, Australia, and other regions in Spain covering the same time period, while RSV levels were at least one Log GC/L over the reported in the aforementioned studies⁵⁶⁻⁶¹. In recent years, the possibility of transmission of various respiratory viruses through food and water consumption has been discussed⁶². The absence of RSV and IAV in all effluent samples analysed in this study indicates an almost non-existent risk of transmissibility caused by ineffective water treatment, a finding of significant relevance, especially given the current situation where IAV H5N1 has been detected in sewage⁶³. Nevertheless, the high presence of SARS-CoV-2 in effluent samples, together with the presence of these respiratory viruses in several of the analysed biosolids samples and the lack of studies regarding non-respiratory routes of transmission, warrant the need for further studies to assess public health risks.

Recently, a new proposal by The Urban Wastewater Treatment Directive (UWWTD), requested that member states should monitor antibiotic resistance at WWTPs serving over 100,000 individuals¹⁹. As this monitoring has been proposed to be performed for both influent and effluent wastewater samples, it should tackle both environmental transmission risks arising from WWTPs and provide insights into resistance patterns within specific regional areas.

In this study, ESBL-*E. coli* levels in influent samples were very high, with 6.63 Log CFU /100 mL on average, with no statistical differences among the different WWTPs and along the year. When analysing the reclamation treatment applied by the WWTPs, only mean reductions of 1.43 Log were observed for ESBL-*E. coli*, with 4.30 Log counts on average in effluent samples, which surpasses by 3 Logs the levels reported in other studies, suggesting the important role of effluent water in the dissemination of ARB in the food chain if used for irrigation and the need to improve water reclamation processes^{14,64,65}. Similarly, the high levels of ESBL-*E. coli* in biosolids, suggest the need for further treatments before application in agriculture.

Fig. 10 | Morphological distribution of type, size, and shape of (T)-MPs in influent and effluent wastewater samples from six different WWTPs (P1-P6). PE polyethylene, PET polyethylene terephthalate, PA polyamide, PP polypropylene, PS polystyrene, PVC polyvinyl chloride, PTFE polytetrafluoroethylene, PAM polyacrylamide.

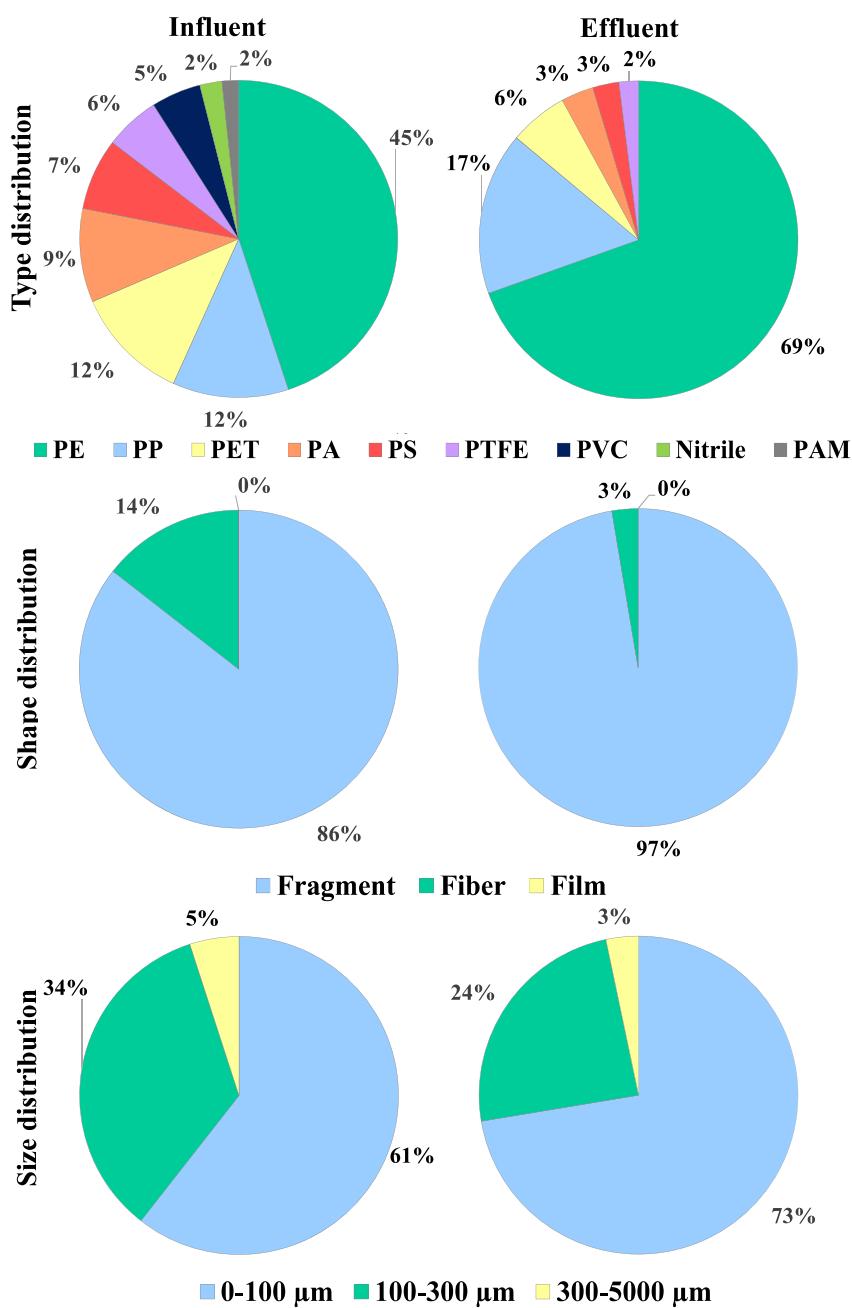

As well as resistant bacteria, the spread of ARGs needs to be addressed worldwide¹³. Thus, it is important to understand and mitigate their occurrence in different ecological systems. This study has shown the prevalence of 11 different ARGs belonging to 7 of the most widely used antibiotic groups in effluent water and biosolids⁶⁶. Our study revealed that sulfonamide ARGs (*sul1* and *sul2*) were the genes with higher concentrations in effluents and biosolid samples. In line with previous studies, levels of sulfonamide resistance genes in effluent samples were higher than macrolide, tetracycline, and quinolone resistance genes^{66,67}. Furthermore, sulfonamide gene levels were higher in biosolids than effluents (Fig. 5) as in the Mao et al. 2015 aforementioned study, highlighting the risk of biosolids as carriers of ARGs⁶⁴. Levels of *bla_{CTX-M}*, ARG that confer resistance to beta-lactamase, were 4 Log higher than levels of viable *ESBL-E. coli*, which could be explained by the longer persistence of DNA⁶⁸, the presence of extracellular genetic material with bacterial surfaces, colloids, and bacteriophages, which

shields it from nucleases^{69–72}. This fact supports the idea that the dissemination of ARGs is not only carried out by viable bacteria but also by being found free in the environment or carried by other microorganisms such as bacteriophages⁷³.

ARGs profiles were comparable in effluents and biosolids despite gene concentration differences except for *cmlA_2* and *ermB_1*. The *cmlA_2* gene, which confer resistance to phenicol, was not found in any effluent samples indicating that environmental conditions, microbial populations, or the presence of contaminants in water treatment facilities may have impacted effluents but not biosolids. In March–May 2022, the *ermB_1* gene was only detected in effluent samples, whereas the *ermA* gene, conferring resistance to macrolide-lincosamide-streptogramin B group antibiotic, was only detected in biosolid samples collected in January, consistent with previously reported data, whereas *erm* genes were only detected in biosolids⁷⁴. Cold stress, which is linked with low temperatures, may increase horizontal gene transfer

of ARGs, explaining this fluctuation along the year⁷⁵. The significant presence of the ARGs and ESBL-*E. coli* supports assertions that land application of biosolids may disseminate ARGs to soil bacteria and demonstrate their potential introduction to food products via both irrigation and amendment⁷⁶. Furthermore, from a One Health perspective, the dissemination of ARGs in aquatic environments may have implications for both animal and human health, underscoring the importance of enhancing reclamation processes through innovative strategies such as membrane bioreactors.

The extensive presence of MPs in wastewater sources significantly contributes to environmental contamination and poses considerable risks. In this sense, WWTPs play an important role in hindering MPs from entering water environments⁷⁷. As observed in this work, the concentration of MPs in wastewater decreased in effluent samples as compared to influent samples, being the water treatment more efficient in removing higher size particles. The number of MPs found in the different samples agreed with those reported in the literature. Previous works investigated the abundance of MPs in urban WWTPs, with ranges of 0.28 to 3.14×10^4 particles/L in the influent, which significantly differed from 0.01 to 2.97×10^2 particles/L in the effluent⁷⁸. However, they did not refer to the removal efficiency depending on the particle size. In this work, a higher efficiency in reducing MPs (between 77–100%) of higher particle size (S)-MPs has been observed, which was similar to the 88–94% efficiency of municipal WWTPs previously reported⁷⁹. However, this value was significantly reduced for MPs with smaller particle size (S)-MPs and presented a great variability depending on the WWTP studied (4–59%). Deng et al. (2023) reported that the removal efficiency of MPs in a petrochemical WWTPs reached 92% and highlighted that the primary treatment removed most of the MPs⁸⁰ (87.5%). Talvitie et al. (2015) also stated that the primary treatment could remove most of the MPs, although they did not refer to their particle size⁸¹. They reported that the major part of the fibers can be removed already in primary sedimentation process, which agreed with the lower proportion of fibers (as compared to fragments) found in these samples. While some authors have indicated that removing MPs from wastewater is technically feasible and cost-effective, suggesting that membrane bioreactors and sludge incineration are the best options, further research is necessary to enhance processes within a circular economy framework⁸².

Concerning the type of polymers detected, there is a higher prevalence of PE, PET, PS, and PA, as it has been previously reported for drinking water and petrochemical and urban WWTPs^{80,83–85}. Furthermore, WWTPs were more efficient in removing polymers with higher density such as PA and PET, probably during the density separation step, favouring a significant reduction of these polymers in the effluent wastewater. Furthermore, the size of more than 90% of microplastic particles detected in WWTPs ranged between 1 and 300 μm and fragments were found to be the most prevalent shape of microplastics, in agreement with other works⁸⁶.

Within this context, MPs release into the environment through sludge and effluent wastewater can also pose another risk, since MPs can accumulate/transport harmful pollutants, posing concerns about their role in treatment resistance and disease spread⁸⁷. Bacteria and viruses have been reported to adsorb onto MPs, forming plastispheres⁸⁸. Pathogenic bacteria, including those harmful to humans and fish, have also been found in communities of MPs^{89–91}. Regarding viruses, the primary interaction with MPs involves electrostatic adhesion, increasing the risk of waterborne viral transmission. These viral or bacterial plastispheres not only resist UV treatment but can also promote infections, as shown for polystyrene MPs, which have been observed to facilitate IAV infection of host cells^{91,92}. Additionally, the persistence of pathogen-carrying MPs in aquatic environments raises concerns about reverse zoonosis, where these plastispheres might be ingested by aquatic organisms, potentially endangering human populations through the food chain⁹³. In

summary, MPs can act as carriers for pathogenic bacteria and viruses in municipal sewage, intensifying concerns about public health and the environment.

The wide distribution of MPs in wastewater sources and the capability of some viruses to remain intact after traditional tertiary treatment disinfection processes (UV and chlorination) undoubtedly bring about environmental pollution and risk. Regarding MPs, their removal before reaching environmental water courses is highly recommended. To overcome these problems, several researchers are focused on finding cutting-edge methods to improve the efficiency of microplastic removal rates in WWTPs, although the literature is still scarce. Nasir et al. 2024, have recently reviewed innovative technologies for the removal of microplastics, highlighting the use of a membrane bioreactor system which combines biological treatments (aerobic, anaerobic) with membrane technology, thus improving sludge separation and effluent quality as compared to traditional methods⁹⁴. Al-Amir et al., 2024 proposed the use of ultrafiltration in WWTP. It consists on a low-pressure (1–10 bar) method that removes particles using perforated asymmetric membranes up to 1–100 μm ⁹⁵. In the case of viruses, over the past few decades, as reviewed by Ibrahim et al. 2021 and Al-Hazmi et al. 2022, several efforts have been made to employ membrane-based and other hybrid technologies to effectively eliminate waterborne enteric viruses^{96,97}. Technologies such as microfiltration (MF), ultrafiltration (UF), and membrane bioreactors (MBR) have been widely applied. The major concerns with these technologies are the factors impacting membrane performance regarding virus removal efficiency and sustainable operation, including physical sieving, adsorption, cake layer formation, and changes in membrane fouling. Additionally, microalgae-based approaches have emerged as a biological alternative to energy-intensive and expensive disinfection techniques⁹⁸. Utilising microalgal processes, in conjunction with natural temperature, pH, or light conditions in treatment systems, may facilitate the complete removal of viruses from wastewater. Also, enhancing systems to filter out particles of extremely small sizes, such as MPs or viruses, from reclaimed water increases protection against other potentially harmful contaminants, including pathogenic bacteria. Finally, despite these treatment methods having various advantages and disadvantages, combining these systems aims to overcome their known technical and economic limitations.

Overall, the findings of this research underscore the potential threats to public health associated with the reuse and release of reclaimed water, particularly concerning microbiological pathogens and environmental pollutants like microplastics, as well as the release of emerging contaminants into the environment and food chain through the use of biosolids in agriculture. These risk factors, including the persistence of enteric viruses, the inadequate reduction of microbial load and antibiotic resistance genes, and the prevalent presence of microplastics, emphasize the need for a holistic approach in addressing health concerns. Integrating these insights from wastewater analysis as well as human epidemic respiratory viruses monitoring into the broader One Health framework is crucial for devising effective policies, improving water treatment processes, and safeguarding both human and ecosystem health in a sustainable manner.

Methods

Methods for viruses and ARGs in wastewater and biosolid samples

Grab influent ($n = 72$) and effluent ($n = 72$) wastewater samples were collected monthly along with dehydrated biosolid samples ($n = 72$) from 6 different urban WWTPs over a one-year period (January 2022–December 2022). Samples were grabbed early in the morning (8 am) by collecting ~500 mL of wastewater in sterile HDPE plastic containers (Labbox Labware, Spain). Collected samples were transferred on ice to the laboratory, kept refrigerated at 4 °C, and concentrated within 24 h. Samples were artificially contaminated with 10^6 PCR units

(PCRU) of porcine epidemic diarrhea virus (PEDV) strain CV777, serving as a coronavirus model. Additionally, 10^6 PCRU of mengovirus (MgV) vMC₀ (CECT 100,000) were used as a non-enveloped counterpart for recovery efficiency assessment. Effluent wastewater samples were concentrated through a previously validated aluminium-based adsorption-precipitation method^{11,99}. Briefly, 200 mL of sample was adjusted to pH 6.0 and Al(OH)₃ precipitate formed by adding 1 part 0.9 N AlCl₃ solution to 100 parts of sample. Then, pH was readjusted to 6.0 and sample mixed using an orbital shaker at 150 rpm for 15 min at room temperature. Next, viruses and ARGs were collected by centrifugation at 1700 \times g for 20 min. The pellet was resuspended in 10 mL of 3% beef extract pH 7.4, and samples were shaken for 10 min at 150 rpm. Finally, the concentrate was recovered by centrifugation at 1900 \times g for 30 min and the pellet was resuspended in 1 mL of phosphate buffer saline (PBS) and stored at -80°C . Alternatively, 40 mL of influent wastewater samples were processed with the Enviro Wastewater TNA Kit (Promega Corp., Spain) vacuum concentration system following the manufacturer's instructions¹⁰⁰. For biosolid samples, 0.1 g of biosolid were resuspended in 900 μL PBS for nucleic acid extraction prior to PCR analyses.

Nucleic acid extraction from influent and effluent wastewater concentrates and biosolid suspensions was performed by using the Maxwell® RSC Instrument (Promega, Spain) with the Maxwell RSC Pure Food GMO for viral and ARG extraction. Specific programs, namely 'Maxwell RSC Viral Total Nucleic Acid' and 'PureFood GMO and Authentication,' were employed for viral and ARG extractions, respectively.

Virus detection and quantification

The detection of process control viruses, PEDV and MgV, was carried out through RT-qPCR using the One Step PrimeScript™ RT-PCR Kit (Perfect Real Time) (Takara Bio Inc., USA) as detailed elsewhere¹⁰¹. Levels of HuNoV GI and GII, HAstV, RV, HAV, and HEV were determined using the RNA UltraSense One-Step kit (Invitrogen, USA), following previously described procedures^{9,11}. The occurrence of crAssphage was established using the qPCR Premix Ex Taq™ kit (Takara Bio Inc)¹⁰². PMMoV detection was determined using the PMMoV Fecal Indicator RT-qPCR Kit (Promega, Spain) following the manufacturer's instructions. SARS-CoV-2 detection was performed by targeting the N1 region of the nucleocapsid gene. The One Step PrimeScript™ RT-PCR Kit (Perfect Real Time) was used with N1 primers and conditions described by CDC¹⁰³. IAV detection followed the protocol described by CDC (2009) using primers from CDC (2020) and the One Step PrimeScript™ RT-PCR Kit (Perfect Real Time)¹⁰⁴.

Different controls were used in all assays: negative process control consisting of PBS; whole process control to monitor the process efficiency of each sample (spiked with PEDV and MgV); and positive (targeted gene reference material) and negative (RNase-free water) RT-qPCR controls. The recoveries of PEDV and MgV, spiked as enveloped and non-enveloped viral process controls, respectively, ranged between 6.31 and 59.65% (data not included). The validation of results for targeted viruses adhered the criteria specified in ISO 15216-1:2017, where a recovery of the process control of $\geq 1\%$ is required¹⁰⁵.

Commercially available gBlock synthetic gene fragments (Integrated DNA Technologies, Inc., USA) of HuNoVs GI and GII, HAstV, RV, HAV, HEV, and crAssphage were used to prepare standard curves for quantification. For IAV and RSV quantification, Twist Synthetic InfluenzaV H1N1 RNA control (Twist BioScience, South San Francisco, CA, USA), and purified RNA of RSV (Vircell, S.L., Spain) were used. The PMMoV Fecal Indicator RT-qPCR Kit (Promega) provided PMMoV RNA for generating a standard curve. A table, featuring primers, probes, PCR conditions, limit of quantification (LOQ/L), and limit of detection (LOD/L) for all targeted viruses in this work is available in the Supplementary materials (Supplementary Table 1).

Quantification of viable somatic coliphages, *E. coli*, and Extended Spectrum Beta-Lactamases producing *E. coli*

One mL of influent and effluent samples was filtered through sterile 0.45 μm pore syringe filters (Labbox Labware, S.L., Spain) to remove bacteria and fungus¹⁰⁶. Phage enumeration was performed by plaque counting using the commercial Bluephage Easy Kit for Enumeration of Somatic Coliphages (Bluephage S.L., Spain), following manufacturer's instructions. For biosolid samples, 1 g of biosolid was resuspended in 100 mL PBS for both somatic coliphages and *E. coli* enumeration.

For all water and biosolid samples, *E. coli* and ESBL-*E. coli* enumeration was assessed by using selective culture media Chromocult coliform agar (Merck, Darmstadt, Germany) and CHROMagar ESBL (CHROMagar, Paris, France), respectively. Spread plating (0.1 mL) or membrane filtration (200 mL) was used depending on the anticipated bacterial concentration. Influent wastewater samples were diluted serially, and 0.1 mL aliquots were spread-plated. Effluent samples were filtered through a 0.45 μm cellulose nitrate membrane filter (Sartorius, Madrid, Spain). Following incubation at 37°C for 24 hours, results were interpreted, with dark blue-violet colonies considered positive for *E. coli* and dark pink-reddish colonies considered positive for ESBL-*E. coli*. The analysis was performed in duplicate, and the results were expressed as CFU/100 mL. The detection limit (LOD) for *E. coli* and ESBL-*E. coli* counts in the influent and biosolid samples was 2.0 Log CFU/100 mL (100 CFU/100 mL), while in the effluents, the LOD was 0 Log CFU/100 mL (1 CFU/100 mL).


Detection and quantification of antimicrobial resistance genes in effluent waters and biosolids

In this study, 11 ARGs that confer resistance to Sulfonamides (*sul1*, *sul2_1*), beta-lactamase (*pbp2b*, *bla_{CTX-M}*), phenicols (*cmlA_2*), nitroimidazoles (*nme*), MLSB (*ermB_1*, *ermA*), tetracyclines (*tetPB_3*, *tetA_1*) and fluoroquinolones (*qacA_1*), were only detected in effluent waters and biosolids. The 16 S rRNA gene was used as positive control for qPCR measurement. Quantification of the 12 selected genes was performed by high-throughput quantitative PCR (HT-qPCR) using the SmartChip™ Real-Time PCR system (TakaraBio, CA, USA) by Resistomap Oy (Helsinki, Finland). qPCR cycling conditions and processing of raw data were described elsewhere¹⁰⁷⁻¹¹⁰. Each DNA sample was analysed in duplicate. Data processing and analysis were performed by using a python-based script by Resistomap Oy (Helsinki, Finland)^{100,111}.

Digestion of organic material and isolation of MPs

Initial steps consisted on optimizing the protocol for the removal of organic material and the isolation of the maximum number of MPs from wastewater and biosolid samples. Different volumes of water, amounts of biosolids and digestion strategies for organic biomass removal were tested to remove the greatest amount of organic material without compromising the integrity of the MPs. Avoiding filter clogging was a requirement during the methodology development, to facilitate further identification of MPs. To reduce the risk of external contamination by MPs, laboratory consumables made of glass were used, the reagents were purified by filtering through a 0.2 μm pore size nitrocellulose filter (Whatman, Maidstone, UK), 100% cotton lab aprons were used, samples were processed in a laminar flow cabinet, the beakers were covered with a watch glass, disposable nitrile gloves were used and, before and after using the material, all used materials were rinsed thoroughly with deionized water. In order to assure that the isolation of MPs was effective and external contamination did not occur, a negative control (NC) was included every month and a positive control (PC) was carried out every 3 months. The positive control was made with fluorescent polystyrene microspheres (Invitrogen, Waltham, USA) of 1 μm in diameter. Specifically, a solution of 1000 beads/20 μL was prepared and 20 μL of this solution was incorporated before the pre-treatment and, the number of remaining microbeads after the

Fig. 11 | Schematic representation. Scheme summary of the methodology used for the isolation, quantification, and identification of microplastics (MPs).

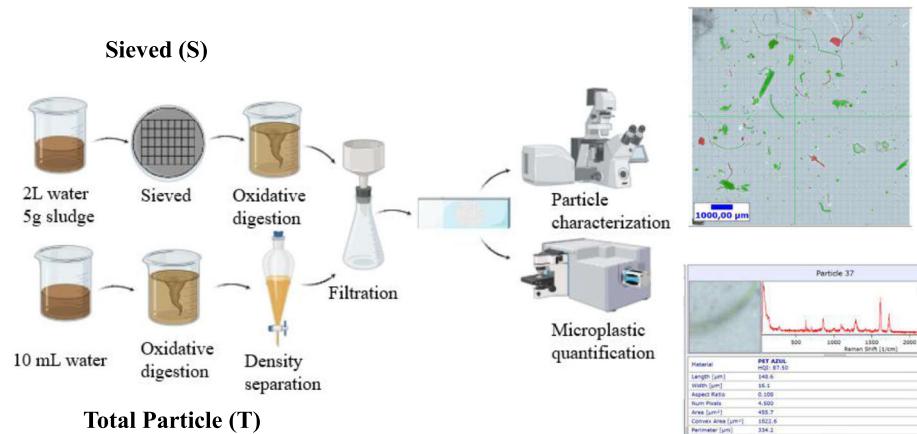

digestion protocol was determined to calculate the percentage of recovery. The average value of particle recovery was 93.9%.

Two different pre-treatment protocols were finally defined:

(1) Sieved > 300 μm or (S): With this pre-treatment, all solid particles (including MPs) larger than 300 μm were isolated from 2 L of wastewater or 5 g of biosolid samples after sieving, oxidative digestion, and filtration steps.

(2) Total Particles or (T): With this pre-treatment all solid particles (including MPs) with a size between 1 μm and 5 mm were isolated from a 10 mL aliquot of wastewater after oxidative digestion, density separation, and filtration steps.

Through protocol (S), a larger and more representative amount of wastewater was treated, but particles smaller than 300 μm were lost. In the other hand, protocol (T) allowed the analysis of particles down to 1 μm in size, but the amount of analysed wastewater was much smaller to avoid filter clogging.

In both protocols (S) and (T), oxidative digestion was performed to remove organic material, adapting the method described by the National Oceanic and Atmospheric Administration (NOAA)¹¹².

In the case of the Sieved 300 μm or (S) protocol (Figs. 11), 2L of wastewater or 5 g of biosolids were treated. The 5 g of biosolids were previously dispersed in 100 mL of ultrapure MilliQ water by applying stirring and heat during 30 minutes at 30 °C. The wastewater or biosolid dispersion were subsequently poured through a 300 μm mesh stainless steel sieve. The retained particles were collected by washing with MilliQ water into a beaker and digested by adding an equivalent volume of NaClO (14%, VWR chemical, USA). After heating at 75 °C for 3 h under stirring, the sample was sieved again to remove the disaggregated smallest particles. The particles retained on the sieve were collected by washing with MilliQ water on a 0.8 μm pore size nitrocellulose filter (Whatman, USA). The filter was protected from external contamination between a microscope glass slide and a glass cover, and finally dried at 40 °C for 24 h in a convection oven.

In the case of the Total Particles or (T) protocol, an oxidative digestion (Fenton reaction) was performed on a 10 mL wastewater sample by adding 20 mL of a H₂O₂ (30%, Sigma- Aldrich, USA) solution and 20 mL of a 0.05 M Fe (II) solution prepared by mixing FeSO₄ (Sigma- Aldrich, USA), H₂SO₄ (96%, PanReac AppliChem, ITW Reagents, USA) and deionized water. The sample was then heated at 75 °C for 30 min under stirring. The digestion step was repeated if any remaining organic material was visually absent. Thereafter, a density separation was performed after adding NaCl (99.5%, Sigma- Aldrich, USA) until saturation. Subsequently, the sample was left to sediment for 30 min in a separatory funnel and the supernatant was filtered through a 0.8 μm pore size nitrocellulose filter (Whatman, USA) under vacuum. The filter was also protected between glass slide and coverslip and dried at 40 °C for 24 hours.

Characterization of particles present in biosolid and wastewater samples

Filters obtained after pre-treatment protocols (S) and (T) were photographed using an EVO CAM II macrophotography equipment (Vision Engineering, Woking, UK) and the ViPlus software (2018, Vision Engineering). Two partially overlapping 2MPx color photos were taken for each filter, always at 20x magnification, with half of the filter appearing in each photo. These images were fused by digital stitching techniques using the mosaic J command of the FIJI software (ImageJ 1.49q Software, National Institutes of Health, USA). Each image showed a 25*15 mm field of view. The pixel size was 13.3 microns, obtaining an image to calibrate in each photo session to have precise external calibration data. A rough quantification was performed, and all particles, including MPs, were characterized using the Nis Elements BR 3.2 software (Nikon Corporation, Japan). To achieve this, a macro of programmed actions was designed in which, firstly, the pixel size was calibrated in the complete image of the filter, then a matrix-iterative detection tool for particles less bright than the filter was applied, which facilitated a binary segmentation by brightness levels and achieve the selection of the particles of each filter in an automated way, only in the filtration zone. Finally, the data of all the particles were exported to obtain the count and the different morphological values of numerous parameters and perform the statistical calculations.

For the characterization, the particles were classified into 3 size ranges of 1–100 μm , 100–300 μm and 300–5000 μm . The particles were also classified according to their circularity, calculated from the measured perimeter and area of each particle according to Eq. 1, in 3 ranges: 0–0.4, 0.4–0.8, and 0.8–1. A circularity value of 1.0 indicates a perfect circle. As the value approaches 0.0, it indicates an increasingly elongated polygon. Particles with a circularity less than 0.4 were considered as fibers.

$$\text{Circularity} = 4\pi \left(\frac{\text{area}}{\text{perimeter}^2} \right) \quad (1)$$

In addition, the efficiency of WWTPs in removing particles was calculated according to the following equation:

$$\text{Efficiency} = \frac{\text{influent} - \text{effluent}}{\text{influent}} \times 100 \quad (2)$$

Where: Efficiency = particle removal efficiency (%); influent = number of particles detected at the WWTP influent; effluent = number of particles detected at the WWTP effluent.

Quantification of microplastics present in biosolid and wastewater samples

Quantification, identification, and characterization of MPs was carried out only on samples from the odd months. The analysis was performed using an automated Raman microscope Alpha300 raman (Witec, Ulm, Germany). First, each filter was mapped by acquiring a total of 1089 images, which after reconstruction represented a 27% of the filter area or 1 cm². The present particles were detected and selected by performing image analysis using the ParticleScout 6.0 software in automatic mode.

After particle selection, analysis on each particle by Raman spectroscopy and subsequent identification were carried out. The optimal conditions for Raman spectra acquisition were as follows: 785 nm laser which facilitates to identify fluorescent particles, 300 lines/mm diffraction grating opening, spectral range between 0 and 3000 cm⁻¹, 10 accumulations, 0.2 second acquisition time, and 40 mW laser power. The spectrum of each particle was registered and compared with an in-house build spectral library of polymers. The reference polymer materials included in the spectral library were polyethylene (PE), polyethylene terephthalate (PET), polyamide (PA), polypropylene (PP), polystyrene (PS), polyvinyl chloride (PVC), polytetrafluoroethylene (PTFE), polyacrylamide (PAM), Polyarylsulfones (PSU), Polymethylmethacrylate (PMMA), nitrile rubber (NBR), Cellophane and Melamine. Particles that had a 75% or better match (HQI) between the sample and reference spectra were identified as composed of the same material or of a similar chemical nature. In addition, a visual inspection was carried out and the spectrum acquisition was repeated on the particles where a clear identification was not initially possible. Three rules were considered to discriminate between plastics and non-plastics and to prioritize the particles to be analysed: (i) the object must not show cellular or natural organic structures; (ii) the fibre thickness must be uniform along the entire length; (iii) the colour of the particles must be clear and homogeneous¹¹³. The MPs already identified were classified based on material type, size, morphology, and area.

Statistical analysis

Results were statistically analysed and significance of differences was determined on the ranks with a one-way analysis of variance (ANOVA) and Tukey's multiple comparison tests. In all cases, a value of $p < 0.05$ (confidence interval 95%) was deemed significant.

Data availability

The datasets used and/or analysed during the current study available from the corresponding author on reasonable request.

Received: 20 February 2024; Accepted: 23 July 2024;

Published online: 02 August 2024

References

1. Barcelo, D., & Petrovic, M. The Handbook of Environmental Chemistry (D. Barcel & Andrey G. Kostianoy, Eds.; Springer) (2011).
2. FAO. Water for Sustainable Food and Agriculture A report produced for the G20 Presidency of Germany. Retrieved 17 October 2023, from www.fao.org/publications (2017).
3. K Mishra, R., Mentha, S. S., Misra, Y., & Dwivedi, N. Emerging pollutants of severe environmental concern in water and wastewater: A comprehensive review on current developments and future research. <https://doi.org/10.1016/j.wen.2023.08.002> (2023).
4. Oude Munnink, B. B., & van der Hoek, L. Viruses causing gastroenteritis: the known, the new and those beyond. *Viruses*, **8**, <https://doi.org/10.3390/v8020042> (2016).
5. Bosch, A., Guix, S., Sano, D. & Pintó, R. M. New tools for the study and direct surveillance of viral pathogens in water. *Curr. Opin. Biotechnol.*, **19**, 295–301 (2008).
6. Okoh, A. I., Sibanda, T. & Gusha, S. S. Inadequately treated wastewater as a source of human enteric viruses in the environment. *Int. J. Environ. Res. Public Health* **7**, 2620–2637 (2010).
7. EC, E. C. Regulation (EU) 2020/741 of The European Parliament and of the Council of 25 May 2020 on minimum requirements for water reuse (Text with EEA relevance). *Off. J. Eur. Union*, L, **177**, 32–55(63) (2020).
8. Canh, V. D., Torii, S., Furumai, H. & Katayama, H. Application of Capsid Integrity (RT-)qPCR to assessing occurrence of intact viruses in surface water and tap water in Japan. *Water Res.* **189**, 116674 (2021).
9. Cuevas-Ferrando, E., Pérez-Cataluña, A., Falcó, I., Randazzo, W., & Sánchez, G. Monitoring human viral pathogens reveals potential hazard for treated wastewater discharge or reuse. *Front. Microbiol.*, **13**. <https://doi.org/10.3389/FMICB.2022.836193> (2022).
10. Gyawali, P. & Hewitt, J. Detection of infectious noroviruses from wastewater and seawater using PEMAXTM treatment combined with RT-qPCR. *Water* **10**, 841 (2018).
11. Randazzo, W. et al. Interlaboratory comparative study to detect potentially infectious human enteric viruses in influent and effluent waters. *Food Environ. Virol.* **11**, 350–363 (2019).
12. Truchado, P. et al. Monitoring of human enteric virus and coliphages throughout water reuse system of wastewater treatment plants to irrigation endpoint of leafy greens. *Sci. Total Environ.* **782**, 146837 (2021).
13. One Health Initiative (n.d.). Retrieved 17 October 2023, from www.archive.onehealthinitiative.com/index.php.
14. Oliveira, M. et al. Surveillance on ESBL- Escherichia coli and Indicator ARG in wastewater and reclaimed water of four regions of Spain: Impact of different disinfection treatments. *Antibiotics*, **12**. <https://doi.org/10.3390/ANTIBIOTICS12020400> (2023).
15. Schwartz, T., Kohnen, W., Jansen, B. & Obst, U. Detection of antibiotic-resistant bacteria and their resistance genes in wastewater, surface water, and drinking water biofilms. *FEMS Microbiol. Ecol.* **43**, 325–335 (2003).
16. Koutsoumanis, K. et al. Role played by the environment in the emergence and spread of antimicrobial resistance (AMR) through the food chain. *EFSA J.* **19**, e06651 (2021).
17. Gajdoš, S. et al. Synergistic removal of pharmaceuticals and antibiotic resistance from ultrafiltered WWTP effluent: Free-floating ARGs exceptionally susceptible to degradation. *J. Environ. Manag.* **340**, 117861 (2023).
18. PlasticsEurope. Plastics-the Facts 2020. An analysis of European plastics production, demand, and waste data. Retrieved 12 September 2023. https://plasticseurope.org/wp-content/uploads/2021/09/Plastics_the_facts-WEB-2020_versionJun21_final.pdf (2020).
19. EC. Proposal for a revised Urban Wastewater Treatment Directive. Retrieved 10 November 2023, from https://environment.ec.europa.eu/publications/proposal-revised-urban-wastewater-treatment-directive_en (2022).
20. Wang, L. et al. Environmental fate, toxicity and risk management strategies of nanoplastics in the environment: Current status and future perspectives. *J. Hazard. Mater.* **401**, 123415 (2021).
21. Pironti, C., et al. Microplastics in the environment: intake through the food web, human exposure and toxicological effects. *Toxics*, **9**. <https://doi.org/10.3390/TOXICS9090224> (2021).
22. Fackelmann, G. & Sommer, S. Microplastics and the gut microbiome: How chronically exposed species may suffer from gut dysbiosis. *Mar. Pollut. Bull.* **143**, 193–203 (2019).
23. Jenner, L. C. et al. Detection of microplastics in human lung tissue using μFTIR spectroscopy. *Sci. Total Environ.* **831**, 154907 (2022).
24. Ibrahim, Y. S. et al. Detection of microplastics in human colectomy specimens. *JGH Open* **5**, 116–121 (2021).
25. Zhu, L. et al. Identification of microplastics in human placenta using laser direct infrared spectroscopy. *Sci. Total Environ.* **856**, 159060 (2023).
26. Leslie, H. A. et al. Discovery and quantification of plastic particle pollution in human blood. *Environ. Int.* **163**, 107199 (2022).

27. Bowley, J., Baker-Austin, C., Porter, A., Hartnell, R. & Lewis, C. Oceanic Hitchhikers – assessing pathogen risks from marine microplastic. *Trends Microbiol.* **29**, 107–116 (2021).

28. Bouwmeester, H., Hollman, P. C. & Peters, R. J. Potential health impact of environmentally released micro- and nanoplastics in the human food production chain: experiences from nanotoxicology. *Environ. Sci. Technol.* **49**, 8932–8947 (2015).

29. Grindler, N. M. et al. Exposure to Phthalate, an endocrine disrupting chemical, alters the first trimester placental methylome and transcriptome in women. *Sci. Rep.* **8**, 1–9 (2018).

30. Sadia, M. et al. Microplastics pollution from wastewater treatment plants: A critical review on challenges, detection, sustainable removal techniques and circular economy. *Environ. Technol. Innov.* **28**, 102946 (2022).

31. Zhu, L. et al. Quantifying health risks of plastisphere antibiotic resistome and deciphering driving mechanisms in an urbanizing watershed. *Water Res.* **245**, 120574 (2023).

32. Vermi, M., et al. Viruses in wastewater: occurrence, abundance and detection methods. <https://doi.org/10.1016/j.scitotenv.2020.140910> (2020).

33. Simmons, F. J. & Xagoraraki, I. Release of infectious human enteric viruses by full-scale wastewater utilities. *Water Res.* **45**, 3590–3598 (2011).

34. AWPRC. Bacteriophages as model viruses in water quality control. *Water Res.* **25**, 529–545 (1991).

35. Grabow, W. O. K. Bacteriophages: update on application as models for viruses in water. *Water SA* **27**, 251–268 (2001).

36. Funderburg, S. W. & Sorber, C. A. Coliphages as indicators of enteric viruses in activated sludge. *Water Res.* **19**, 547–555 (1985).

37. Kott1, Y. Estimation of low numbers of *Escherichia coli* bacteriophage by use of the most probable number method. *Appl. Microbiol.* <https://journals.asm.org/journal/am> (1966).

38. Lucena, F. et al. Reduction of bacterial indicators and bacteriophages infecting faecal bacteria in primary and secondary wastewater treatments. *J. Appl. Microbiol.* **97**, 1069–1076 (2004).

39. Ueda, T. & Horan, N. J. Fate of indigenous bacteriophage in a membrane bioreactor. *Water Res.* **34**, 2151–2159 (2000).

40. Sánchez G., Bosch A. Survival of enteric viruses in the environment and food. *Viruses Foods.* **26**:367–392. https://doi.org/10.1007/978-3-319-30723-7_13 (2016).

41. Bivins, A. et al. Cross-assembly phage and pepper mild mottle virus as viral water quality monitoring tools—potential, research gaps, and way forward. *Curr. Opin. Environ. Sci. Health* **16**, 54–61 (2020).

42. Farkas, K. et al. Critical evaluation of CrAssphage as a molecular marker for human-derived wastewater contamination in the aquatic environment. *Food Environ. Virol.* **11**, 113–119 (2019).

43. García-Aljaro, C., Ballesté, E., Muniesa, M. & Jofre, J. Determination of crAssphage in water samples and applicability for tracking human faecal pollution. *Microb. Biotechnol.* **10**, 1775–1780 (2017).

44. Kitajima, M., Iker, B. C., Pepper, I. L. & Gerba, C. P. Relative abundance and treatment reduction of viruses during wastewater treatment processes - Identification of potential viral indicators. *Sci. Total Environ.* **488–489**, 290–296 (2014).

45. Symonds, E. M., Rosario, K. & Breitbart, M. Pepper mild mottle virus: Agricultural menace turned effective tool for microbial water quality monitoring and assessing (waste)water treatment technologies. *PLOS Pathog.* **15**, e1007639 (2019).

46. Tandukar, S., Sherchan, S. P. & Haramoto, E. Applicability of crAssphage, pepper mild mottle virus, and tobacco mosaic virus as indicators of reduction of enteric viruses during wastewater treatment. *Sci. Rep.* **10**, 3616 (2020).

47. Wu, Z., Greaves, J., Arp, L., Stone, D. & Bibby, K. Comparative fate of CrAssphage with culturable and molecular fecal pollution indicators during activated sludge wastewater treatment. *Environ. Int.* **136**, 105452 (2020).

48. Sabar, M. A., Honda, R. & Haramoto, E. CrAssphage as an indicator of human-fecal contamination in water environment and virus reduction in wastewater treatment. *Water Res.* **221**, 118827 (2022).

49. Kitajima, M., Sassi, H. P. & Torrey, J. R. Pepper mild mottle virus as a water quality indicator. *Npj Clean. Water* **2018** **1**, 1–9 (2018).

50. Rosario, K., Symonds, E. M., Sinigalliano, C., Stewart, J., & Breitbart, M. Pepper Mild Mottle Virus as an indicator of fecal pollution. *Appl. Environ. Microbiol.* **75**, 7261. <https://doi.org/10.1128/AEM.00410-09> (2009a).

51. Symonds, E. M., Nguyen, K. H., Harwood, V. J. & Breitbart, M. Pepper mild mottle virus: A plant pathogen with a greater purpose in (waste)water treatment development and public health management. *Water Res.* **144**, 1–12 (2018).

52. Hamza, I. A., Jurzik, L., Überla, K. & Wilhelm, M. Evaluation of pepper mild mottle virus, human picobirnavirus and Torque teno virus as indicators of fecal contamination in river water. *Water Res.* **45**, 1358–1368 (2011).

53. Gyawali, P., Croucher, D., Ahmed, W., Devane, M. & Hewitt, J. Evaluation of pepper mild mottle virus as an indicator of human faecal pollution in shellfish and growing waters. *Water Res.* **154**, 370–376 (2019).

54. Kuroda, K. et al. Pepper mild mottle virus as an indicator and a tracer of fecal pollution in water environments: Comparative evaluation with wastewater-tracer pharmaceuticals in Hanoi, Vietnam. *Sci. Total Environ.* **506–507**, 287–298 (2015).

55. Schmitz, B. W., Kitajima, M., Campillo, M. E., Gerba, C. P. & Pepper, I. L. Virus Reduction during Advanced Bardenpho and Conventional Wastewater Treatment Processes. *Environ. Sci. Technol.* **50**, 9524–9532 (2016).

56. Ando, H. et al. Impact of the COVID-19 pandemic on the prevalence of influenza A and respiratory syncytial viruses elucidated by wastewater-based epidemiology. *Sci. Total Environ.*, **880**. <https://doi.org/10.1016/J.SCITOTENV.2023.162694> (2023).

57. Boehm, A. B. et al. More than a Tripledemic: Influenza A Virus, Respiratory Syncytial Virus, SARS-CoV-2, and human metapneumovirus in wastewater during winter 2022–2023. *Environ. Sci. Technol. Lett.* **10**, 622–627 (2023).

58. Hughes, B. et al. Respiratory Syncytial Virus (RSV) RNA in Wastewater Settled Solids Reflects RSV Clinical Positivity Rates. *Environ. Sci. Technol. Lett.* **9**, 173–178 (2022).

59. Mercier, E. et al. (123 C.E.) Municipal and neighbourhood level wastewater surveillance and subtyping of an influenza virus outbreak. *Sci. Rep.*, **12**, 15777.

60. Toribio-Avedillo, D. et al. Monitoring influenza and respiratory syncytial virus in wastewater. Beyond COVID-19. *Sci. Total Environ.* **892**, 164495 (2023).

61. Wolfe, M. K. et al. Wastewater-based detection of two influenza outbreaks. *Environ. Sci. Technol. Lett.* **2022**, 687–692 (2022).

62. Guo, M., Tao, W., Flavell, R. A. & Zhu, S. Potential intestinal infection and faecal-oral transmission of SARS-CoV-2. *Nat. Rev. Gastroenterol. Hepatol.* **18**, 269–283 (2021).

63. Detection of hemagglutinin H5 influenza A virus sequence in municipal wastewater solids at wastewater treatment plants with increases in influenza A in spring, 2024. Marlene K. Wolfe, Dorothea Duong, Bridgette Shelden, View ORCID ProfileElana M. G. Chan, Vikram Chan-Herur, Stephen Hilton, Abigail Harvey Paulos, Alessandro Zulli, Bradley J. White, View ORCID ProfileAlexandria B. Boehm. <https://doi.org/10.1101/2024.04.26.24306409>.

64. Nzima, B. et al. Resistotyping and extended-spectrum beta-lactamase genes among *Escherichia coli* from wastewater treatment plants and recipient surface water for reuse in South Africa. <https://doi.org/10.1016/j.nmni.2020.100803> (2020).

65. Raven, K. E., et al. Genomic surveillance of *Escherichia coli* in municipal wastewater treatment plants as an indicator of clinically

relevant pathogens and their resistance genes. *Microb. Genomics*, **5**, <https://doi.org/10.1099/mgen.0.000267> (2019).

66. Mao, D. et al. Prevalence and proliferation of antibiotic resistance genes in two municipal wastewater treatment plants. *Water Res.* **85**, 458–466 (2015).

67. Christgen, B. et al. Metagenomics shows that low-energy anaerobic–aerobic treatment reactors reduce antibiotic resistance gene levels from domestic wastewater. <https://doi.org/10.1021/es505521w> (2015).

68. Gekenis, M. T., Rigotti, S., Hummerjohann, J., Walsh, F. & Drissner, D. Long-term persistence of blaCTX-M-15 in soil and lettuce after introducing extended-Spectrum β -Lactamase (ESBL)-producing *Escherichia coli* via manure or water. *Microorganisms* **2020** **8**, 1646 (2020).

69. Bryzgunova, O. E. et al. Redistribution of free- and cell-surface-bound DNA in blood of benign and malignant prostate tumor patients. *Acta Nat.* **7**, 115 (2015). [/pmc/articles/PMC4463421/](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC4463421/).

70. Laktionov, P. P. et al. Cell-surface-bound nucleic acids: Free and cell-surface-bound nucleic acids in blood of healthy donors and breast cancer patients. *Ann. N. Y. Acad. Sci.* **1022**, 221–227 (2004).

71. Nagler, M., Insam, H., Pietramellara, G. & Ascher-Jenull, J. Extracellular DNA in natural environments: features, relevance and applications. *Appl. Microbiol. Biotechnol.* **2018** **102**, 6343–6356 (2018).

72. Zhang, Y., Snow, D. D., Parker, D., Zhou, Z. & Li, X. Intracellular and extracellular antimicrobial resistance genes in the sludge of livestock waste management structures. *Environ. Sci. Technol.* **47**, 10206–10213 (2013).

73. Muniesa, M., Colomer-Lluch, M. & Jofre, J. Potential impact of environmental bacteriophages in spreading antibiotic resistance genes. *Future Microbiol* **8**, 739–751 (2013).

74. Szczepanowski, R. et al. Detection of 140 clinically relevant antibiotic-resistance genes in the plasmid metagenome of wastewater treatment plant bacteria showing reduced susceptibility to selected antibiotics. *Microbiology* **155**, 2306–2319 (2009).

75. Miller, J. H., Novak, J. T., Knocke, W. R. & Pruden, A. Elevation of antibiotic resistance genes at cold temperatures: implications for winter storage of sludge and biosolids. *Lett. Appl. Microbiol.* **59**, 587–593 (2014).

76. Xu, S., Liu, Y., Wang, R., Zhang, T. & Lu, W. Behaviors of antibiotic resistance genes (ARGs) and metal resistance genes (MRGs) during the pilot-scale biophysical drying treatment of sewage sludge: Reduction of ARGs and enrichment of MRGs. *Sci. Total Environ.* **809**, 152221 (2022).

77. Enfrin, M., Dumée, L. F. & Lee, J. Nano/microplastics in water and wastewater treatment processes – Origin, impact and potential solutions. *Water Res.* **161**, 621–638 (2019).

78. Liu, W. et al. A review of the removal of microplastics in global wastewater treatment plants: Characteristics and mechanisms. *Environ. Int.* **146**, 106277 (2021).

79. Iyare, P. U., Ouki, S. K. & Bond, T. Microplastics removal in wastewater treatment plants: a critical review. *Environ. Sci.: Water Res. Technol.* **6**, 2664–2675 (2020).

80. Deng, L. et al. The destiny of microplastics in one typical petrochemical wastewater treatment plant. *Sci. Total Environ.* **896**, 165274 (2023).

81. Talvitie, J. et al. Do wastewater treatment plants act as a potential point source of microplastics? Preliminary study in the coastal Gulf of Finland, Baltic Sea. *Water Sci. Technol.* **72**, 1495–1504 (2015).

82. Larissa VuoriMarkku Ollikainen How to remove microplastics in wastewater? A cost-effectiveness analysis. *Ecol. Econ.* **192**, 107246 (2022).

83. Koelmans, A. A. et al. Microplastics in freshwaters and drinking water: Critical review and assessment of data quality. *Water Res.* **155**, 410–422 (2019).

84. Schymanski, D., Goldbeck, C., Humpf, H. U. & Fürst, P. Analysis of microplastics in water by micro-Raman spectroscopy: Release of plastic particles from different packaging into mineral water. *Water Res.* **129**, 154–162 (2018).

85. Senathirajah, K. et al. Estimation of the mass of microplastics ingested – A pivotal first step towards human health risk assessment. *J. Hazard. Mater.* **404**, 124004 (2021).

86. Lee, J. H. et al. Detection of microplastic traces in four different types of municipal wastewater treatment plants through FT-IR and TED-GC-MS. *Environ. Pollut.* **333**, 122017 (2023).

87. Issac, M. N. & Kandasubramanian, B. Effect of microplastics in water and aquatic systems. *Environ. Sci. Pollut. Res.* **2021** **28**, 19544–19562 (2021).

88. Reeves, A. et al. Potential transmission of SARS-CoV-2 through microplastics in sewage: A wastewater-based epidemiological review. <https://doi.org/10.1016/j.envpol.2023.122171> (2023).

89. Kruglova, A. et al. The dangerous transporters: A study of microplastic-associated bacteria passing through municipal wastewater treatment. <https://doi.org/10.1016/j.envpol.2022.120316> (2023).

90. Lai, K. P. et al. Microplastics act as a carrier for wastewater-borne pathogenic bacteria in sewage. <https://doi.org/10.1016/j.chemosphere.2022.134692> (2022).

91. Manoli, K. et al. Investigation of the effect of microplastics on the UV inactivation of antibiotic-resistant bacteria in water. *Water Res.* **222**, 43–1354 (2022).

92. Wang, C., et al. Polystyrene microplastics significantly facilitate influenza A virus infection of host cells. <https://doi.org/10.1016/j.jhazmat.2022.130617> (2022).

93. Zhong, H. et al. The hidden risk of microplastic-associated pathogens in aquatic environments. *Ecol. Environ. Health* **2**, 142–151 (2023).

94. Nasir, M. S. et al. Innovative technologies for removal of microplastic: A review of recent advances. *Helijon* **10**, e25883 (2024).

95. Amri, A., Yavari, Z., Reza Nikoo, M. & Karimi, M. Microplastics removal efficiency and risk analysis of wastewater treatment plants in Oman. *Chemosphere* **359**, 142206 (2024).

96. Ibrahim, Y. et al. Detection and removal of waterborne enteric viruses from wastewater: A comprehensive review. *J. Environ. Chem. Eng.* **9**, 105613 (2021).

97. Al-Hazmi, H. E. et al. Recent advances in aqueous virus removal technologies. *Chemosphere* **305**, 135441 (2022).

98. Bhatt, A., Arora, P. & Prajapati, S. K. Occurrence, fates and potential treatment approaches for removal of viruses from wastewater: A review with emphasis on SARS-CoV-2. *J. Environ. Chem. Eng.* **8**, 104429 (2020).

99. Pérez-Cataluña, A. et al. Comparing analytical methods to detect SARS-CoV-2 in wastewater. *Sci. Total Environ.* **758**, 143870 (2021).

100. Girón-Guzmán, I. et al. Evaluation of two different concentration methods for surveillance of human viruses in sewage and their effects on SARS-CoV-2 sequencing. *Sci. Total Environ.* **862**, 160914 (2023).

101. Puente, H., Randazzo, W., Falcó, I., Carvajal, A. & Sánchez, G. Rapid selective detection of potentially infectious porcine epidemic diarrhea coronavirus exposed to heat treatments using viability RT-qPCR. *Front. Microbiol.* **11**, 1911 (2020).

102. Stachler, E. et al. Quantitative CrAssphage PCR Assays for Human Fecal Pollution Measurement. *Environ. Sci. Technol.* **51**, 9146–9154 (2017).

103. CDC. CDC 2019-novel coronavirus (2019-nCoV) real-time RT-PCR diagnostic panel. <https://www.Fda.Gov/Media/134922/Download>. Accessed October 2020.

104. Sanghavi, S. K., Bullotta, A., Husain, S. & Rinaldo, C. R. Clinical evaluation of multiplex real-time PCR panels for rapid detection of respiratory viral infections. *J. Med. Virol.* **84**, 162–169 (2012).

105. Haramoto, E. et al. A review on recent progress in the detection methods and prevalence of human enteric viruses in water. *Water Res* **135**, 168–186 (2018).

106. Girón-Guzmán, I. et al. Urban wastewater-based epidemiology for multi-viral pathogen surveillance in the Valencian region, Spain. *Water Res* **255**, 121463 (2024).

107. Muurinen, J. et al. Influence of manure application on the environmental resistome under finnish agricultural practice with restricted antibiotic use. <https://doi.org/10.1021/acs.est.7b00551> (2017).

108. Muziasari, W. I., et al. Aquaculture changes the profile of antibiotic resistance and mobile genetic element associated genes in Baltic Sea sediments. *FEMS Microbiol. Ecol.*, **92**. <https://doi.org/10.1093/FEMSEC/FIW052> (2016).

109. Muziasari, W.I., et al. The resistome of farmed fish feces contributes to the enrichment of antibiotic resistance genes in sediments below baltic sea fish farms. *Front. Microbiol.*, **7**, 229367. <https://doi.org/10.3389/FMICB.2016.02137/BIBTEX> (2017).

110. Wang, F. H. et al. High throughput profiling of antibiotic resistance genes in urban park soils with reclaimed water irrigation. *Environ. Sci. Technol.* **48**, 9079–9085 (2014).

111. Yin Lai, F., Muziasari, W., Virta, M., Wiberg, K., & Ahrens, L. Profiles of environmental antibiotic resistomes in the urban aquatic recipients of Sweden using high-throughput quantitative PCR analysis ☆. <https://doi.org/10.1016/j.envpol.2021.117651> (2021).

112. Masura, J., Baker, J. E., 1959-, Foster, G. D. (Gregory D., Arthur, C., & Herring, C.) Laboratory methods for the analysis of microplastics in the marine environment: recommendations for quantifying synthetic particles in waters and sediments. <https://doi.org/10.25923/4X5W-8Z02> (2015).

113. Hidalgo-Ruz, V., Gutow, L., Thompson, R. F. & Thiel, M. Microplastics in the marine environment: A review of the methods used for identification and quantification. *Environ. Sci. Technol.* **46**, 3060–3075 (2012).

Acknowledgements

This research was supported by project the Lagoon project (PROMETEO/2021/044) and MCEC WATER (PID 2020 116789 RB C 42 AEI/FEDER, UE). IATA-CSIC is a Centre of Excellence Severo Ochoa (CEX2021-001189-S MCIN/AEI / 10.13039/ 501100011033). IF (MS21-006) and SB were supported by a postdoctoral contract grant for the requalification of the Spanish university system from the Ministry of Universities of the Government of Spain, financed by the European Union (NextGeneration EU). IG-G is recipient of a predoctoral contract from the Generalitat Valenciana (ACIF/2021/181), EC-F is recipient of a postdoctoral contract from the MICINN Call 2018 (PRE2018-083753) and AP-C is recipient of the contract Juan de la Cierva – Incorporación (IJC2020-045382-I) which is financed by MCIN/AEI/10.13039/501100011033 and the European Union “NextGenerationEU/PRTR”. The authors thank Andrea López de Mota, Arianna Pérez, Agustín Garrido Fernández, Mercedes Reyes Sanz, José Miguel Pedra Tellols, and Alcira Reyes Rovatti for their technical support.

Author contributions

All authors have provided substantial contributions to the conception or design of the work or the acquisition, analysis, or interpretation of the data, drafted the work or revised it critically for important intellectual content, have approved of the completed version, and are accountable for all aspects of the work in ensuring that questions related to the accuracy or integrity of any part of the work are appropriately investigated and resolved.

Competing interests

The authors declare no competing interests.

Additional information

Supplementary information The online version contains supplementary material available at <https://doi.org/10.1038/s41545-024-00365-y>.

Correspondence and requests for materials should be addressed to Enric Cuevas-Ferrando.

Reprints and permissions information is available at <http://www.nature.com/reprints>

Publisher's note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

© The Author(s) 2024